


Nidec

Power

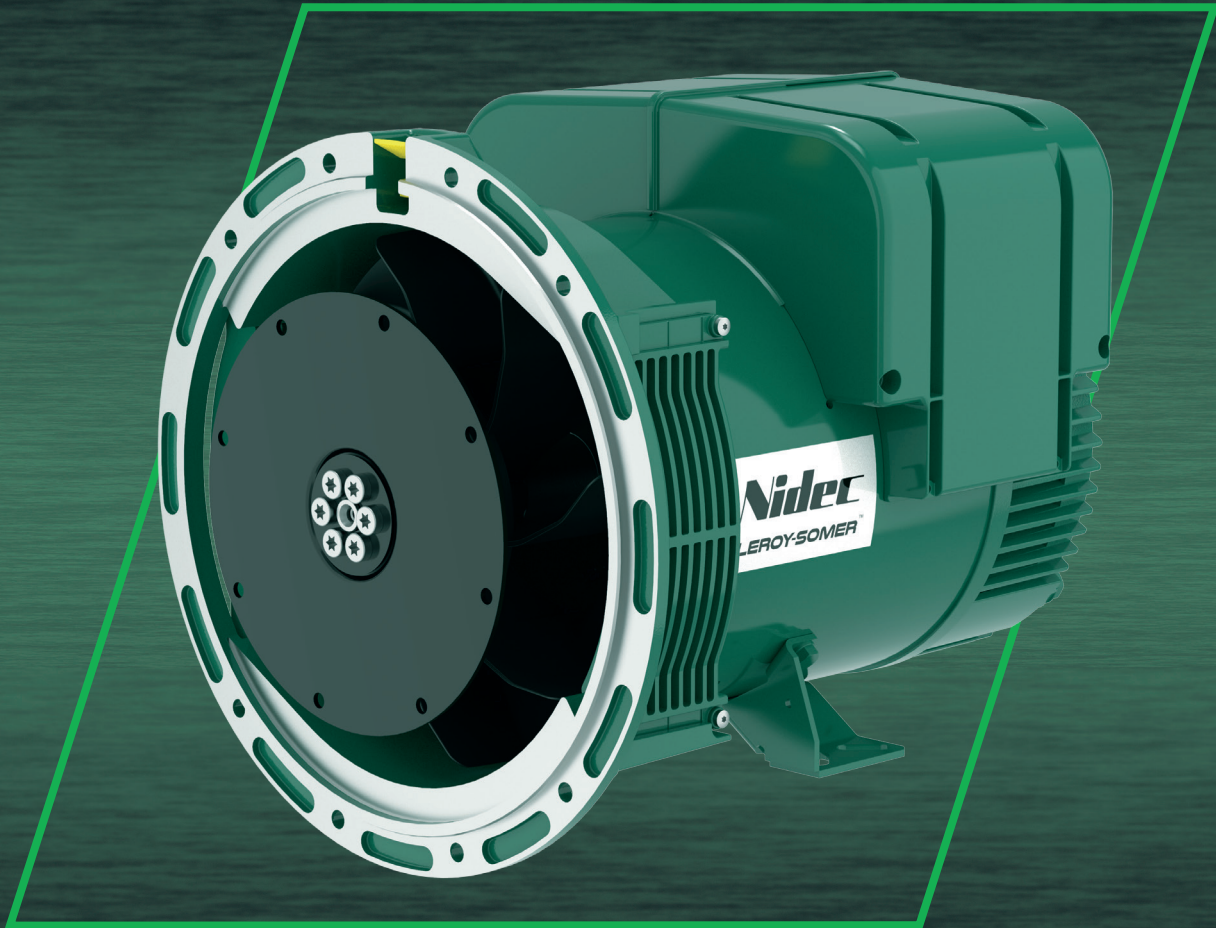

LSA 40

Low Voltage Alternator - 4 poles

Dedicated single-phase

10.5 to 16 kVA - 50 Hz / 11.5 to 17.5 kVA - 60 Hz

Electrical and mechanical data

LEROY-SOMER[™]

The best of performance

The Leroy-Somer™ single-phase LSA 40 alternator has been designed to offer you the best power generation performances. With its meticulous design and optimized architecture, the single-phase LSA 40 strikes the perfect balance between compactness, reliability, performance and longevity.

The Leroy-Somer™ single-phase LSA 40 alternator is a machine with a dedicated single-phase winding. It has 10 to 40% more power than an equivalent three-phase alternator connected with the same single-phase voltage.

Standards

The Leroy-Somer™ single-phase LSA 40 alternator meets all key international standards and regulations such as IEC 60034, NEMA MG 1.32-33, ISO 8528-3, CSA C22.2 n°100-14, UL 1446, UL 1004-1 and UL 1004-4.

EC, UKCA, CMIM, CSA, UL 1446, UL recognized and UL listed declarations and certifications are available for the LSA 40.

The standards IEC 61000-6-2, IEC 61000-6-3, IEC 61000-6-4, VDE 0875G, VDE 0875N and EN 55011 allow compliance with group 1 class A for the European zone.

The Leroy-Somer™ single-phase LSA 40 alternator is designed, manufactured and marketed in an ISO 9001 and ISO 14001 quality assurance environment.

Electrical characteristics and performances

- Class H insulation
- 2/3 pitch winding, dedicated single-phase, 4-wire (M) reconnectable
(15% derating for use at PF = 0.8) (PF = 1 corresponds to general use for single-phase voltage)
- Possible voltages:
 - 50 Hz: 230 V in series, 115 V in parallel
 - 60 Hz: 240 V in series, 120 V in parallel

Excitation and regulation system

Excitation system		Regulation options		
AVR	SHUNT	C.T. Current transformer for paralleling	Mains paralleling	Remote voltage potentiometer
R221	Standard			√

Protection system and options

- Degree of protection: IP 23
- Complete winding protection for clean environments with relative humidity ≤ 95 %, including indoor marine environments
- Options:
 - Filters on air inlet: derating 5%
 - Filters on air inlet and air outlet (IP 44): derating 10%
 - Reinforced winding protection for harsh environments and relative humidity greater than 95%
 - Space heater
 - Thermal protection for stator windings
 - Shaft height: H = 180 mm (to be specified when ordering)

Mechanical construction

- Compact rigid assembly to better withstand generator vibrations
- Steel frame and terminal box
- Aluminum flanges and shields
- Two-bearing and single-bearing versions designed to be suitable for commercially-available heat engines
- Half-key balancing two-bearing
- Greased for life bearings (20 000h)
- Direction of rotation: clockwise and anti-clockwise (without derating)

Terminal box design

- Easy access to the voltage regulator and to the connections
- 8-way terminal block for reconnecting the voltage
- Predrilled holes for cable gland

Frame dimensions

- Dimensions, weight and coupling are identical to LSA 40 three-phase (see catalog ref. 6242)



LSA 40 - Dedicated single-phase 10.5 to 16 kVA - 50 Hz / 11.5 to 17.5 kVA - 60 Hz

General characteristics



Insulation class	H	Excitation system	SHUNT
Winding pitch	2/3 (wind. M)	AVR type	R221
Number of wires	4	Voltage regulation (*)	± 0.5 %
Protection	IP 23	Short-circuit current	-
Altitude	≤ 1 000 m	Total Harmonic Distortion THD (**)	< 5 %
Overspeed	2 250 R.P.M.	Waveform: NEMA = TIF (**)	< 100
Air flow	0.06 m ³ /s (50 Hz) - 0.072 m ³ /s (60 Hz)		

(*) Steady state (**) Total harmonic distortion between phases, no-load or on-load (non-distorting)

Ratings: 50 Hz - 1 500 R.P.M.

kVA / kW - Power factor = 1				
Duty / T° C	Continuous/40°C		Stand-by/40°C	Stand-by/27°C
Class / T° K	H / 125° K	F / 105° K	H / 150° K	H / 163° K
1 phase series 	230 V	230 V	230 V	230 V
1 phase parallel 	115 V	115 V	115 V	115 V
LSA 40 VS1	10.5	9.5	11	11.4
LSA 40 VS2	12	11	12.7	13.2
LSA 40 S3	13.2	12	14	14.5
LSA 40 S4	14.5	13.2	15.4	16
LSA 40 M5	16	14.6	17	17.6

60 Hz - 1 800 R.P.M.

kVA / kW - Power factor = 1				
Duty / T° C	Continuous/40°C		Stand-by/40°C	Stand-by/27°C
Class / T° K	H / 125° K	F / 105° K	H / 150° K	H / 150° K
1 phase series 	240 V	240 V	240 V	240 V
1 phase parallel 	120 V	120 V	120 V	120 V
LSA 40 VS1	11.5	10.5	12	13
LSA 40 VS2	13.5	12.5	14.5	15
LSA 40 S3	14.5	13	15.5	16
LSA 40 S4	16	14.5	17	17.5
LSA 40 M5	17.5	16	19	19.5



Rating kVA at P.F. 0.8 = rating kVA/kW at P.F. 1 x 0.85 - Derating (kVA) cl B = rating (kVA) class H x 0.80

Efficiencies (%)

Class H / 40°C - Power factor = 1					
	Single-phase: 230 V - 50 Hz				
	1/4	2/4	3/4	4/4	Stand-by
LSA 40 VS1	81.9	85.3	84.5	82.2	80.9
LSA 40 VS2	82.6	86.5	86.1	84.4	83.5
LSA 40 S3	83.4	87.2	86.8	85.4	84.6
LSA 40 S4	83.5	87.5	87.4	86.2	85.5
LSA 40 M5	83.9	88.1	88.2	87.2	86.7

Class H / 40°C - Power factor = 1					
	Single-phase: 240 V - 60 Hz				
	1/4	2/4	3/4	4/4	Stand-by
LSA 40 VS1	82.6	85.4	84.2	82	81
LSA 40 VS2	83.7	86.5	85.6	83.7	82.8
LSA 40 S3	84.1	87.1	86.3	84.6	83.8
LSA 40 S4	84.4	87.6	87	85.5	84.8
LSA 40 M5	84.9	88.2	87.8	86.5	85.8

Transient voltage variation

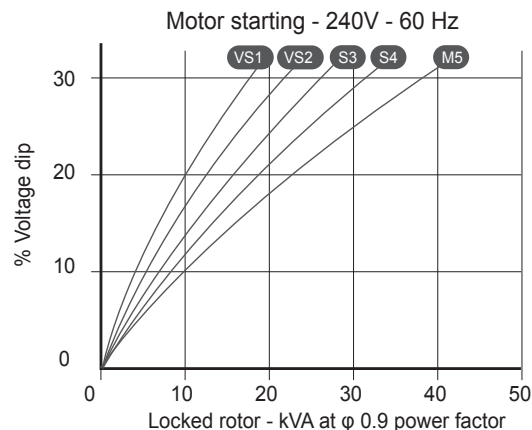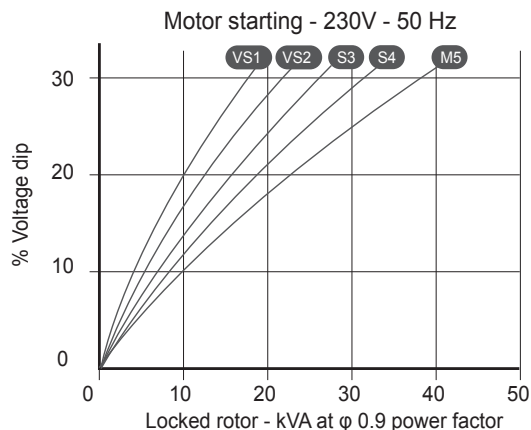



www.nidecpower.com

Connect with us at:



© 2026 Moteurs Leroy-Somer SAS. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Moteurs Leroy-Somer SAS have an ongoing process of development and reserve the right to change the specification of their products without notice.

Moteurs Leroy-Somer SAS. Headquarters: Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France. Share Capital: 32,239,235 €, RCS Angoulême 338 567 258.