


Circuit diagram

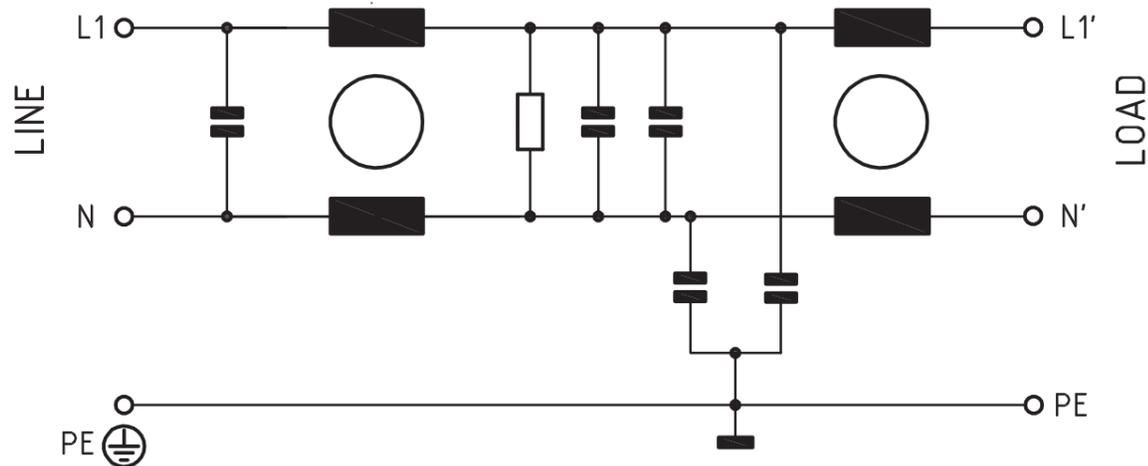

Allgemeine Toleranzen General tolerances Tolérances en général L + 50% - 30% C ± 20% R ± 10%

Daten (single phase) data caractéristiques

Nennstrom bei Umgebungstemp. rated current at an ambient temp. courant nominal à une température ambiante 11 A 40 °C

Nennspannung rated voltage tension nominal max. 250 V, 50/60Hz

Betriebsfrequenz operating frequency fréquence de service max. 60 Hz

Ableitstrom nominal Nominal operational leakage courant nominal Spannung P-E / Frequenz 250 VAC 50 Hz I<sub>lk</sub> 2.59mA

Maximaler Ableitstrom Max leakage current courant maximale de fuite Spannung P-E / Frequenz 250 VAC 50 Hz I max. 5.21mA

DC-Widerstand DC-resistance DC-résistance @25 °C max. 2 x 27.5 mOhm

Pruefspannung 100% Schlusskontr. test voltage 100% final test tension d'essais contrôle final 100% P/N->E 2.2 kV/DC ≥ 2s P->N 1.1 kV/DC ≥ 2s

Wiederholung mit max. 80% der angegebenen Werte repetition with max. 80% of the specified values répétition avec max. 80% des valeurs spécifiques

Zulaessige Betriebstemp. temperature range gamme de température - 25°C bis/to/à + 85 °C


Klimatische Pruefklasse climatic test class classe d'essais climatique 25/085/21 (IEC/CEI 60068-1)

FS33221-11-07-LL

125198

E

Dimensions (mm)

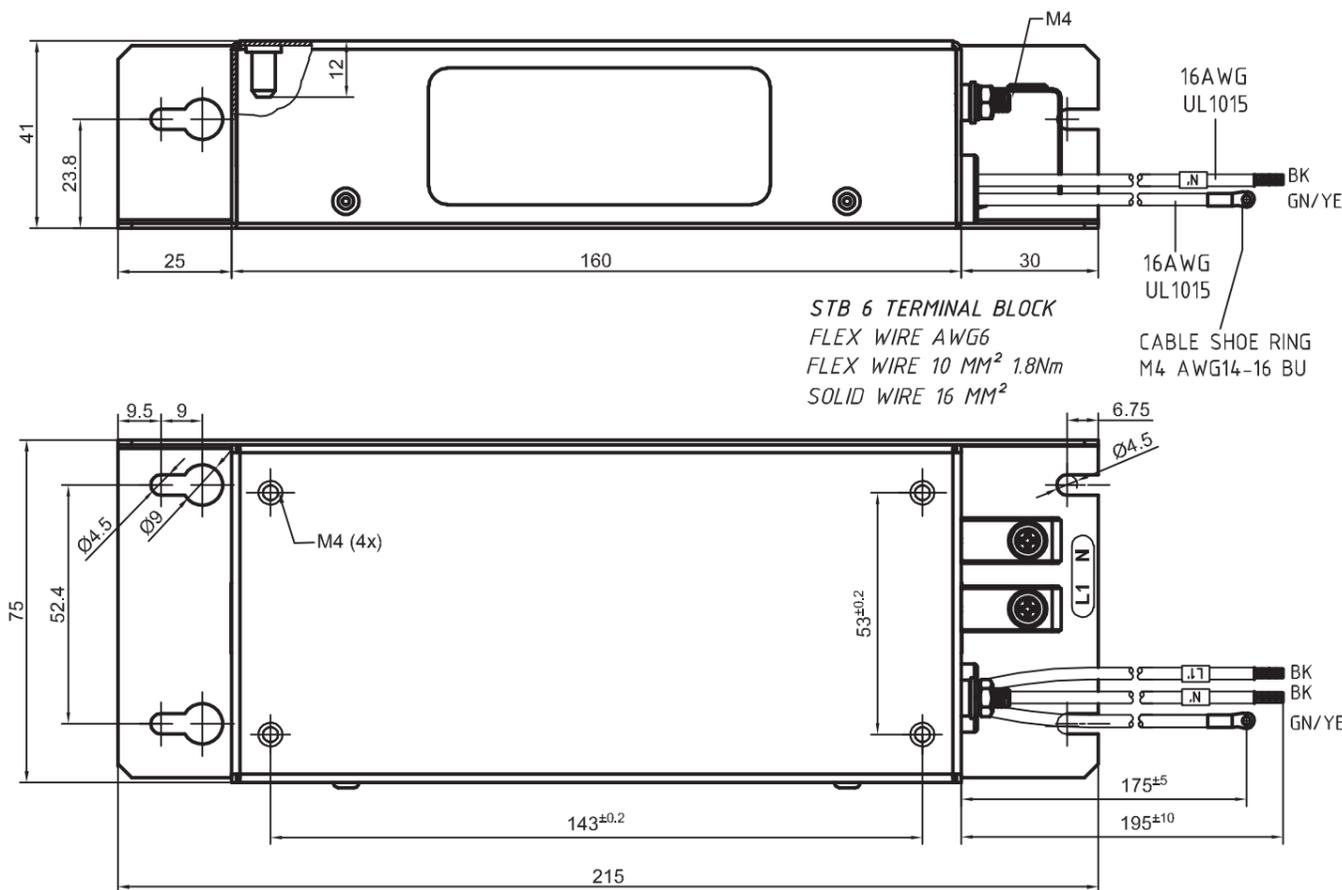

STB 6 TERMINAL BLOCK  
FLEX WIRE AWG6  
FLEX WIRE 10 MM<sup>2</sup> 1.8Nm  
SOLID WIRE 16 MM<sup>2</sup>

16AWG UL1015 BK GN/YE  
16AWG UL1015  
CABLE SHOE RING M4 AWG14-16 BU

Zusatzangaben additional information informations supplémentaires

Vergussmasse potting compound matière de moulage Polyurethane

Gewicht weight poids 490 g

Pruefzeichen approvals homologations  CSA / C-US  UL 1283  CSA C 22.2 No.8  UL UL 1283  ENEC IEC/EN 60939  VDE

Zusätzliche Angaben: Additional remarks: Nidec Control Techniques Part No. 4200-1001

Fuer Masse ohne Toleranz for dimensions without tolerance pour mesure sans tolérance ISO2768-m/EN22768-m

Datenblatt (single phase) data sheet fiche technique

E	20003551,Add customer name Nidec Control...	20.02.2018		%	A3	created	13.02.2018	LAMASR
D	20003139,Change CT label from Emerson to Nidec	18.09.2017				checked	13.02.2018	LAMEYO
C	20001142,CE-Declaration for FS3322x-Series	27.01.2016				released	20.02.2018	LAMEYO
B	150631,Add c-UR-us mark (No.7)	23.09.2014	projection	scale	format	status	date	user
A	add customer number	12.02.2014	FS33221-11-07-LL project					
A2	add customer number	26.11.2013						
rev.	modification / report no.	date	813934 mat. number					

We reserve all rights in this document and in the information contained therein. Passing on and/or copying of this document, use and/or communication of its content is not permitted without authorization

Template: SPC 144312A DSH 125198 E 1 / 1 doc. type doc. number doc. rev. page