
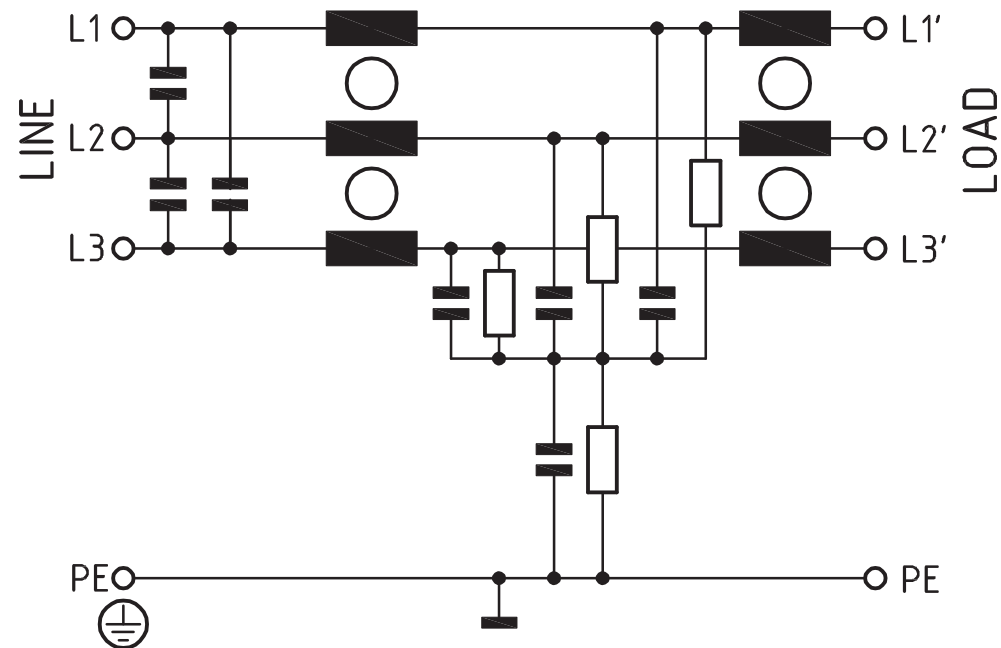





Allgemeine Toleranzen	General tolerances	Tolérances en général	L + 50% - 30%	C ± 20%	R ± 10%
Daten (multi phase)	data	caractéristiques			
Nennstrom bei Umgebungstemp.	rated current at an ambient temp.	courant nominal à une température ambiante	20 A 40 °C		
Nennspannung	rated voltage	tension nominal	max. 3 x 250 V, 50/60Hz		
Betriebsfrequenz	operating frequency	fréquence de service	max. 60 Hz		
Ableitstrom im Betrieb nach IEC 60939-1	Operational leakage current acc. to IEC 60939-1	courant de fuite en fonction en accord avec IEC 60939-1	Spannung P-P / Frequenz 250 VAC 50 Hz I _{lk} . 0.74 mA		
Maximaler Ableitstrom Unterbruch von 2 Phasen	Worst case leakage current 2 phases open circuit	courant maximale de fuite 2 phases circuit ouvert defectueux	Spannung P-E / Frequenz 144 VAC 50 Hz I max. 35.26 mA		
DC-Widerstand	DC-resistance	DC-résistance	@25 °C max. 3 x 11.5 m0hm _____ _____		
Pruefspannung 100% Schlusskontr.	test voltage 100% final test	tension d'essais contrôle final 100%	P/P->E 2.2 kV/DC ≥ 2s P->P 1.1 kV/DC ≥ 2s P->N kV/ ≥ 2s		
Wiederholung mit max. 80% der angegebenen Werte	repetition with max. 80% of the specified values	répétition avec max. 80% des valeurs spécifiques			
Zulaessige Betriebstemp.	temperature range	gamme de température	- 25°C bis/to/à + 85 °C		
Klimatische Pruefklasse	climatic test class	classe d'essais climatique	25/085/21 (IEC/CEI 60068-1)		

FS33222-20-07

123042


F

Dimensions (mm)

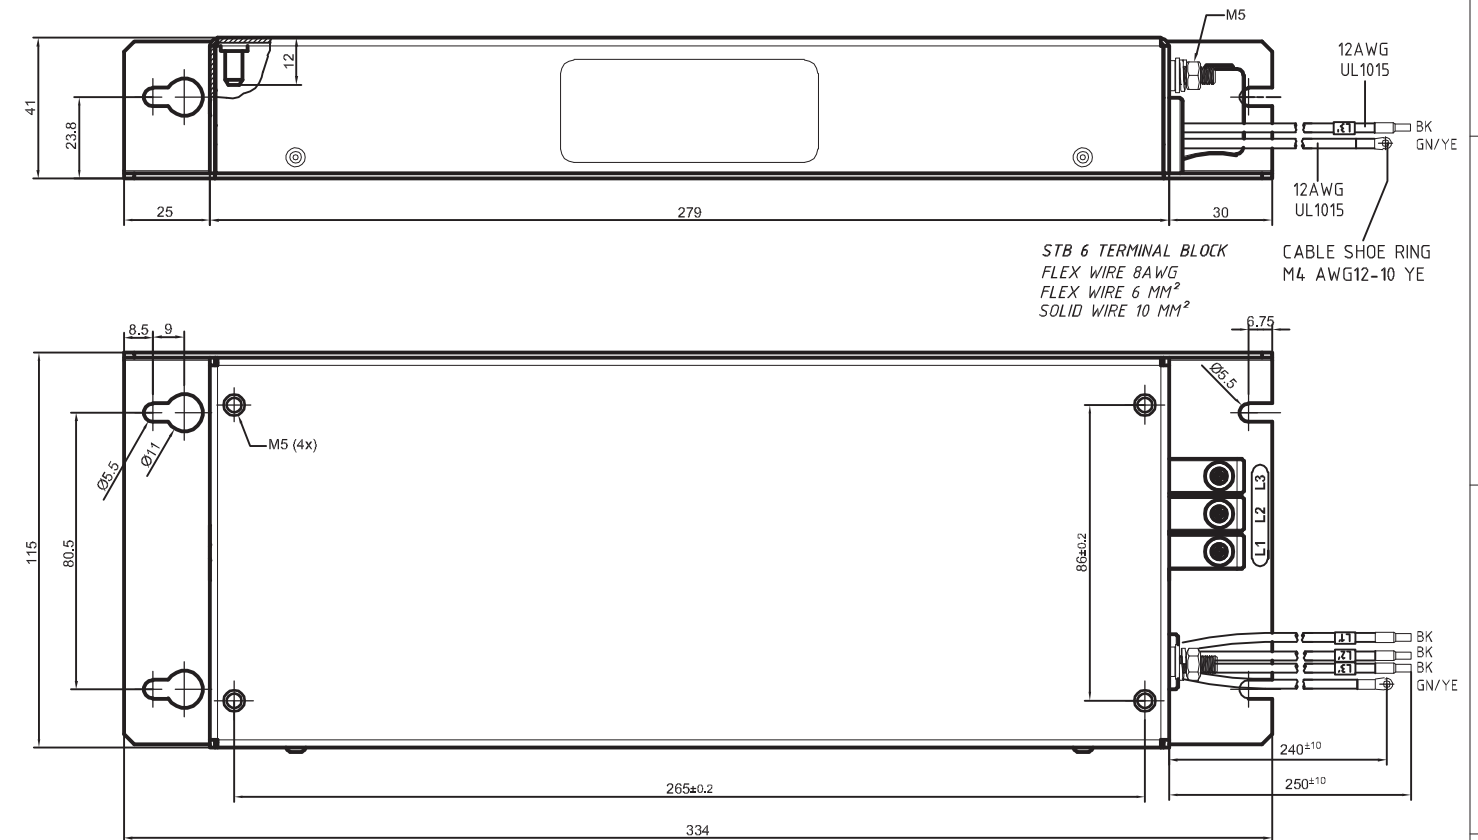

Zusatzangaben	additional information	informations supplémentaires	
Vergussmasse	potting compound	matière de moulage	Polyurethane
Gewicht	weight	poids	1.4 kg
Prüfzeichen ☐ CSA / C-US UL 1283 C 22.2 No.8 ☒ CSA C 22.2 No.8 ☒ UL UL 1283 ☐ ENEC IEC/EN 60939 ☐ VDE ☐ _____	approvals homologations		
Zusätzliche Angaben: Additional remarks: Remarques additionals:			
Nidec Control Techniques Part No. 4200-4002		 	
Fuer Masse ohne Toleranz	for dimensions without tolerance	pour mesure sans tolérance	
		ISO2768-m/EN22768-m	

Datenblatt	(multi phase)	data sheet	fiche technique
------------	---------------	------------	-----------------

F	20003551,Add customer name Nidec Control...	21.02.2018		%	A3	created	13.02.2018	LAMASR
E	20003139,Change CT label from Emerson to Nidec	19.09.2017				checked	13.02.2018	LAMEYO
D	20001142,CE-Declaration for FS3322x-Series	27.01.2016				released	21.02.2018	LAMEYO
C	150631,Add c-UR-us mark (No.7)	23.09.2014	projection	scale	format	status	date	user
B	50004669,add customer number	26.11.2013	FS33222-20-07 project 813803 mat. number					
A		11.11.2013						
rev.	modification / report no.	date						
We reserve all rights in this document and in the information contained therein. Passing on and/or copying of this document, use and/or communication of its content is not permitted without authorization			DSH		123042		F	1 / 1
Template: SPC 144312A			doc. type		doc. number		doc. rev.	page