

Nidec

Drives

Unimotor hd

High Dynamic AC
brushless servo motor

0.64 to 85 Nm



Servo solutions series

Unimotor hd



Unimotor hd is a high dynamic brushless AC servo motor range designed for use in pulse duty applications where rapid acceleration and deceleration are required. The motors are available in frame sizes from 060 to 190.

Reliability and innovation

Unimotor hd is designed using a proven development process that prioritises innovation and reliability. This process has resulted in a market leading reputation for both performance and quality.

Matched motor and drive combinations

Drives and motors from Nidec Drives are designed to function as an optimised system. Unimotor hd is the perfect partner for Digitax and Unidrive.

Accuracy and resolution to suit your application requirements

Choosing the right feedback device for your application is critical in getting optimum performance. Unimotor hd has a range of feedback options that offer different levels of accuracy and resolution to suit most applications:

- Resolver: robust for extreme applications and conditions (low accuracy, medium resolution)
- Incremental encoder: for cost-sensitive applications (low accuracy, medium resolution)
- Absolute – Inductive/Optical, medium and high accuracy/resolution
- EnDat protocol supported
- Safety encoder – part number option code confirmed on factory request
- Electronic motor nameplate upload function standard for EnDat absolute encoder



The ultimate motor and drive combination

Nidec Drives offer drive and motor combinations that provide an optimised system in terms of ratings, performance, cost and ease of use. Unimotor hd motors fitted with high resolution EnDat encoders are pre-loaded with the motor “electronic nameplate” data during the manufacturing process. This data can be read by any of our servo drives and used to automatically optimise the drive settings. This feature simplifies commissioning and maintenance, ensures consistent performance and saves time.

Features

Unimotor hd is suitable for a wide range of industrial applications, due to its extensive range of features:

- Torque range: from 0.64 Nm to 85 Nm
- High torque to inertia ratio for high dynamic performance
- Compact but powerful
- High energy dissipation parking brakes
- IP65 conformance; sealed against water spray and dust when mounted and connected
- Segmented stator design
- World class performance
- Supported by rigorous testing for performance and reliability
- Winding voltage for inverter supply of 400 V and 220 V
- Rated speeds from 1,000 to 6,000 rpm
- Larger shafts to increase torsional rigidity
- Thermal protection by PTC thermistor/ optional KTY84.130 sensor

Drive and motor combinations



Conformance and standards



RoHS
Compliant



Quick reference table						
Frame size	PCD (mm)	Stall (Nm)		Inertia (kg.cm ²) Standard		Inertia (kg.cm ²) High
060	070	0.64	1.92	0.18	0.48	N/A
067	075	1.44	4.72	0.3	0.94	1.15 1.96
089	100	3.2	10.3	0.87	3.2	3.2 6.25
115	130	5.8	18.5	2.4	8.38	7.8 16.6
142	165	10.1	38.0	5.6	27.2	23.4 56.8
190	215	18.8	85.0	22.0	103.5	89.6 227.9

Ordering information

Use the information below in the table to create an order code for a Unimotor hd.

060	UD	B	60	0	T
Frame size	Motor voltage	Stator length	Rated speed*	Brake	Connection type**
	060 - 190 frame	060 frame	060 frame	060 - 190 frame	060 frame
060	ED = 220 V	A to C	60 = 6000 rpm	0 = Not fitted	S = Single cable, power & signal combined
067	UD = 400 V	067 - 115 frame	067 frame	060 - 142B frame	T = YTEC type connectors
089		A to D	30 = 3000 rpm	6 = Parking brake	067 - 190 frame
115		142 frame	60 = 6000 rpm	142C - 190 frame	Size 1 - 17 A M23 2.5 mm²
142		A to E	089 frame	5 = Parking brake	B = Power and signal 180 ° rotatable
190		190 frame	30 = 3000 rpm		D = Single cable, power & signal combined, 180 ° rotatable
		A to F	40 = 4000 rpm		R = Single Cable, power and single combined 8 way EnDat 3 (17 A M23)
			60 = 6000 rpm	-	Size 1.5 - 39 A M40 10 mm²
			115 frame		J = Power and signal 180 ° rotatable
			20 = 2000 rpm		E = Single cable, power & signal combined, 180 ° rotatable
			30 = 3000 rpm		Z = Single Cable, power and single combined 8 way EnDat 3 (39 A M40)
			40 = 4000 rpm		Max single cable size 1.5 - 23 A 4 mm ²
			60 = 6000 rpm		Hybrid Box
			142 frame		H= Hybrid box, power M6 studs, signal connector fixed horizontal
			15 = 1500rpm		
			20 = 2000 rpm		
			30 = 3000 rpm		
			60 = 6000 rpm		
			190 frame		
			10 = 1000 rpm		
			15 = 1500 rpm		
			20 = 2000 rpm		
			30 = 3000 rpm		

Additional options are available upon request but may require a longer lead time to complete, please check with the Drive Centre.

* Not all speeds are available on all motors. Please refer to performance pages 14-32.

** Single cable option must be fitted with KTY thermistor.

For recommended connector sizes please refer to performance pages 14-32.

A	CN		A	-JSHJ
Output shaft	Feedback device		Thermistor	Inertia
060 frame	060 frame	Single Cable	060 – 190 frame	067 – 190 frame
A = Full key fitted to shaft	AR = Resolver	No	A = PTC Thermistor (DIN44082)	JSHJ = High Inertia
F = Key and half key supplied separately	CN = Incremental Encoder	No	C = KTY Thermistor (KTY84.130)	
067 – 190 frame	EG = Inductive EnDat Multi-turn	Yes***		
A = Key	FG = Inductive EnDat Single-turn	Yes***		
	EH = Biss-C Optical Encoder	No		
F = Key and half key supplied separately	067 frame			
	AR = Resolver	No		
	CR = Incremental Encoder	No		
	EG = Inductive EnDat Multi-turn	Yes***		
	FG = Inductive EnDat Single-turn	Yes***		
	060 – 115 frame			
	EE = Inductive EnDat 3 Multi-turn	Yes		
	FE = Inductive EnDat 3 18 bit	Yes		
	EP = Inductive EnDat 3 20 bit Multi-turn	Yes		
	FP = Inductive EnDat 3 20 bit	Yes		
	142 – 190 frame			
	AE = Resolver	No		
	CA**** = Incremental Encoder	No		
	EF = Inductive EnDat Multi-turn	Yes***		
	FF = Inductive EnDat Single-turn	Yes***		
	GF = Optical EnDat Multi-turn high resolution/accuracy	Yes***		
	HF = Optical EnDat Single-turn high resolution/accuracy	Yes***		
	EZ = Biss-C Optical Encoder	No		
	ED***** = Inductive EnDat 3 multi-turn	Yes		
	GD***** = Optical EnDat 3 multi-turn	Yes		

*** Encoder option available also for motors with signal and power connector separately.

**** CR encoder available instead of CA for 089 frame and 115 frame up to length C.

***** 142 & 190 frames only.

Functional safe encoder option available contact factory for confirmed part number and option code.

Unimotor hd range overview

3 Phase VPWM drives 200 - 240 V_{rms}

Δt= 100 °C winding 40 °C maximum ambient.
All data subject to +/-10 % tolerance.

Motor Frame Size (mm)	060ED			067ED				089ED				115ED			
Frame length	A	B	C	A	B	C	D	A	B	C	D	A	B	C	D
Continuous stall torque (Nm)	0.64	1.28	1.92	1.44	2.55	3.70	4.72	3.20	5.50	8.00	10.30	5.80	10.20	14.60	18.80
Peak torque (Nm)	2.24	4.48	6.72	4.35	7.65	11.10	14.60	9.60	16.50	24.00	30.90	17.40	30.60	43.80	56.40
Standard inertia	0.18	0.33	0.48	0.30	0.53	0.75	0.94	0.87	1.61	2.34	3.20	2.40	4.41	6.39	8.38
Standard motor weight (kg)	1.6	2.0	2.2	1.96	2.56	3.16	3.80	3.18	4.28	5.38	6.48	5.20	6.95	8.72	10.49
High inertia (kg cm ²)	♦	♦	♦	1.15	1.42	1.69	1.96	3.23	4.24	5.24	6.25	7.84	10.78	13.70	16.63
High inertia motor weight (kg)	♦	♦	♦	2.4	3.0	3.80	4.30	4.06	5.25	6.46	7.74	6.40	8.30	10.30	14.1
Number of poles	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Speed 2000 (rpm)				Kt(Nm/A) = 1.4 Ke(V/Krpm) = 85.5											
Rated torque (Nm)	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	8.6	11.9	15.6
Stall current (A)	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	7.29	10.43	13.43
Rated power (kW)	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	1.80	2.49	3.27
Recommended power conn' size	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	1	1	1
Speed 3000 (rpm)				Kt(Nm/A) = 0.93 Ke(V/Krpm) = 57											
Rated Torque (Nm)	♦	♦	♦	1.40	2.45	3.50	4.60	3.00	4.85	6.90	♦	4.80	7.70	10.50	♦
Stall Current (A)	♦	♦	♦	1.55	2.74	3.98	5.08	3.44	5.91	8.60	♦	6.24	10.97	15.70	♦
Rated Power (kW)	♦	♦	♦	0.44	0.77	1.10	1.4	0.94	1.52	2.17	♦	1.51	2.42	3.30	♦
Recommended power conn' size	♦	♦	♦	1	1	1	1	1	1	1	♦	1	1	1	♦
Speed 4000 (rpm)				Kt(Nm/A) = 0.7 Ke(V/Krpm) = 42.75											
Rated Torque (Nm)	♦	♦	♦	♦	♦	♦	♦	2.90	4.55	6.35	♦	♦	♦	♦	♦
Stall Current (A)	♦	♦	♦	♦	♦	♦	♦	4.57	7.86	11.43	♦	♦	♦	♦	♦
Rated Power (kW)	♦	♦	♦	♦	♦	♦	♦	1.21	1.91	2.66	♦	♦	♦	♦	♦
Recommended power conn' size	♦	♦	♦	♦	♦	♦	♦	1	1	1	♦	♦	♦	♦	♦
Speed 6000 (rpm)				Kt(Nm/A) = 0.47 Ke(V/Krpm) = 28.5											
Rated Torque (Nm)	0.64	1.28	1.92	1.30	2.20	3.10	4.00	2.65	3.80	5.00	♦	♦	♦	♦	♦
Stall Current (A)	1.36	2.72	4.09	3.06	5.43	7.87	10.04	6.81	11.70	17.02	♦	♦	♦	♦	♦
Rated Power (kW)	0.4	0.8	1.21	0.82	1.38	1.95	2.51	1.67	2.39	3.14	♦	♦	♦	♦	♦
Recommended power conn' size	Y-TEC			1	1	1	1	1	1	1	♦	♦	♦	♦	♦

142ED					190ED						Motor Frame Size (mm)
A	B	C	D	E	A	B	C	D	E	F	Frame length
10.10	17.40	25.00	31.50	38.00	18.50	32.70	52.00	62.00	73.50	85.00	Continuous stall torque (Nm)
30.30	52.20	74.90	94.50	114.00	55.50	98.00	156.00	186.00	221.00	255.00	Peak torque (Nm)
5.60	11.00	17.00	22.10	27.20	22.00	38.30	54.60	70.90	87.20	103.50	Standard inertia
8.57	10.95	13.33	15.72	18.04	15.57	21.10	29.16	34.30	33.69	38.21	Standard motor weight (kg)
23.40	31.75	40.11	48.46	56.80	89.63	117.28	144.93	172.58	200.23	227.88	High inertia (kg cm ²)
10.90	13.70	16.60	19.50	22.30	20.37	25.80	31.23	36.56	41.99	47.41	High inertia motor weight (kg)
10	10	10	10	10	10	10	10	10	10	10	Number of poles
Kt(Nm/A) = 2.8 Ke(V/Krpm) = 171											Speed 1000 (rpm)
♦	♦	♦	♦	♦	♦	♦	49.00	56.50	♦	77.50	Rated torque (Nm)
♦	♦	♦	♦	♦	♦	♦	18.57	22.14	♦	30.36	Stall current (A)
♦	♦	♦	♦	♦	♦	♦	5.13	5.92	♦	8.12	Rated power (kW)
♦	♦	♦	♦	♦	♦	♦	1.5	1.5	♦	1.5	Recommended power conn' size
Kt(Nm/A) = 1.7 Ke(V/Krpm) = 102											Speed 1500 (rpm)
♦	♦	♦	♦	♦	♦	♦	45.00	♦	♦	♦	Rated Torque (Nm)
♦	♦	♦	♦	♦	♦	♦	18.74	♦	♦	♦	Stall Current (A)
♦	♦	♦	♦	♦	♦	♦	5.45	♦	♦	♦	Rated Power (kW)
♦	♦	♦	♦	♦	♦	♦	1.5	♦	♦	♦	Recommended power conn' size
Kt(Nm/A) = 1.4 Ke(V/Krpm) = 85.5											Speed 2000 (rpm)
8.60	15.30	21.40	25.70	29.60	♦	♦	42.50	♦	♦	♦	Rated Torque (Nm)
7.21	12.43	17.86	22.50	27.14	♦	♦	28.11	♦	♦	♦	Stall Current (A)
1.80	3.20	4.48	5.38	6.20	♦	♦	8.90	♦	♦	♦	Rated Power (kW)
1	1	1.5	1.5	1.5	♦	♦	1.5	♦	♦	♦	Recommended power conn' size
Kt(Nm/A) = 0.93 Ke(V/Krpm) = 57											Speed 3000 (rpm)
8.20	14.00	18.40	20.90	♦	15.50	25.00	♦	♦	♦	♦	Rated Torque (Nm)
10.86	18.71	26.88	33.87	♦	19.89	35.16	♦	♦	♦	♦	Stall Current (A)
2.58	4.40	5.78	6.57	♦	4.87	7.85	♦	♦	♦	♦	Rated Power (kW)
1	1.5	1.5	1.5	♦	1.5	1.5	♦	♦	♦	♦	Recommended power conn' size
Kt(Nm/A) = 0.7 Ke(V/Krpm) = 42.75											Speed 4000 (rpm)
♦	11.70	♦	♦	♦	♦	♦	♦	♦	♦	♦	Rated Torque (Nm)
♦	24.86	♦	♦	♦	♦	♦	♦	♦	♦	♦	Stall Current (A)
♦	4.90	♦	♦	♦	♦	♦	♦	♦	♦	♦	Rated Power (kW)
♦	1.5	♦	♦	♦	♦	♦	♦	♦	♦	♦	Recommended power conn' size

♦ Not available

Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12 kHz drive switching frequency.
All other figures relate to a 20 °C motor temperature | Maximum intermittent winding temperature is 140 °C.

Unimotor hd range overview

3 Phase VPWM drives 380 - 480 V_{rms}

$\Delta t = 100^\circ\text{C}$ winding 40°C maximum ambient.

All data subject to +/-10 % tolerance

Motor Frame Size (mm)	060UD			067UD				089UD				115UD			
Frame length	A	B	C	A	B	C	D	A	B	C	D	A	B	C	D
Continuous stall torque (Nm)	0.64	1.28	1.92	1.44	2.55	3.70	4.72	3.20	5.50	8.00	10.30	5.80	10.20	14.60	18.80
Peak torque (Nm)	2.24	4.48	6.72	4.35	7.65	11.10	14.16	9.60	16.50	24.00	30.90	17.40	30.60	43.80	56.40
Standard inertia	0.18	0.33	0.48	0.30	0.53	0.75	0.94	0.87	1.61	2.34	3.20	2.40	4.41	6.39	8.39
Standard motor weight (kg)	1.6	2.0	2.2	1.96	2.56	3.16	3.80	3.18	4.28	5.38	6.48	5.20	6.89	8.60	10.32
High inertia (kg cm ²)	♦	♦	♦	1.16	1.46	1.76	2.06	3.20	4.20	5.20	6.20	7.80	10.80	13.70	16.60
High inertia motor weight (kg)	♦	♦	♦	2.40	3.00	3.60	4.30	4.06	5.30	6.40	7.70	6.40	8.30	10.50	12.20
Number of poles	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Speed 2000 (rpm)				Kt(Nm/A) = 2.4 Ke(V/Krpm) = 147											
Rated torque (Nm)	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	8.60	11.90	15.60
Stall current (A)	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	4.25	6.08	7.83
Rated power (kW)	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	1.8	2.49	3.27
Recommended power conn' size	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	♦	1	1	1
Speed 3000 (rpm)	Kt(Nm/A) = 0.8 Ke(V/Krpm) = 49			Kt(Nm/A) = 1.6 Ke(V/Krpm) = 98											
Rated Torque (Nm)	♦	♦	♦	1.40	2.45	3.50	4.60	3.00	4.85	6.90	8.50	4.80	7.70	10.50	13.60
Stall Current (A)	♦	♦	♦	1.80	1.59	2.31	2.95	2.00	3.44	5.00	6.44	3.63	6.38	9.13	11.75
Rated Power (kW)	♦	♦	♦	0.44	0.77	1.10	1.45	0.94	1.52	2.17	2.67	1.51	2.42	3.30	4.27
Recommended power conn' size	♦	♦	♦	1	1	1	1	1	1	1	1	1	1	1	1
Speed 4000 (rpm)	Kt(Nm/A) = 1.2 Ke(V/Krpm) = 74														
Rated Torque (Nm)	♦	♦	♦	♦	♦	♦	♦	2.90	4.55	6.35	♦	4.50	6.70	8.70	10.50
Stall Current (A)	♦	♦	♦	♦	♦	♦	♦	2.67	4.58	6.67	♦	4.90	8.50	12.17	15.67
Rated Power (kW)	♦	♦	♦	♦	♦	♦	♦	1.21	1.91	2.66	♦	1.86	2.81	3.64	4.4
Recommended power conn' size	♦	♦	♦	♦	♦	♦	♦	1	1	1	♦	1	1	1	1
Speed 6000 (rpm)	Kt(Nm/A) = 0.8 Ke(V/Krpm) = 49														
Rated Torque (Nm)	0.64	1.28	1.92	1.30	2.20	3.10	4.00	2.65	3.80	5.00	♦	3.60	4.80	♦	♦
Stall Current (A)	0.80	1.60	2.40	1.80	3.19	4.63	5.90	4.00	6.88	10.00	♦	7.25	12.75	♦	♦
Rated Power (kW)	0.40	0.80	1.20	0.82	1.38	1.95	2.51	1.67	2.39	3.14	♦	2.27	3.02	♦	♦
Recommended power conn' size	Y-TEC			1	1	1	1	1	1	1	♦	1	1	♦	♦

Stall torque, rated torque and power relate to maximum continuous operation tested in a 20°C ambient at 12 kHz drive switching frequency.
All other figures relate to a 20°C motor temperature.
Maximum intermittent winding temperature is 140°C .

142UD					190UD						Motor Frame Size (mm)
A	B	C	D	E	A	B	C	D	E	F	Frame length
10.10	17.40	25.00	31.50	38.00	18.50	32.70	52.00	62.00	73.50	85.00	Continuous stall torque (Nm)
30.30	52.20	75.00	94.50	114.00	55.50	98.10	156.00	186.00	220.50	255.00	Peak torque (Nm)
6.80	11.90	17.00	22.10	27.20	22.00	38.30	54.60	70.90	87.20	103.50	Standard inertia
8.57	10.95	13.33	15.72	18.10	15.57	21.10	24.63	29.16	33.69	38.21	Standard motor weight (kg)
23.40	31.75	40.11	48.46	56.80	89.63	117.28	144.93	172.58	200.23	227.88	High inertia (kg cm ²)
10.90	13.80	16.60	19.40	22.30	20.40	25.80	31.20	36.60	41.89	47.42	High inertia motor weight (kg)
10	10	10	10	10	10	10	10	10	10	10	Number of poles
Kt(Nm/A) = 4.8 Ke(V/Krpm) = 296											Speed 1000 (rpm)
♦	♦	♦	♦	♦	♦	♦	49.00	56.50	♦	78.3	Rated torque (Nm)
♦	♦	♦	♦	♦	♦	♦	10.90	13.00	♦	17.71	Stall current (A)
♦	♦	♦	♦	♦	♦	♦	5.13	5.92	♦	8.12	Rated power (kW)
♦	♦	♦	♦	♦	♦	♦	1	1	♦	1.5	Recommended power conn' size
Kt(Nm/A) = 3.2 Ke(V/Krpm) = 196											Speed 1500 (rpm)
♦	16.00	22.30	27.00	31.70	♦	30.00	46.20	52.20	60.00	68.50	Rated Torque (Nm)
♦	5.40	7.81	9.84	11.80	♦	10.20	16.25	19.40	22.90	26.56	Stall Current (A)
♦	2.50	3.50	4.24	4.98	♦	4.70	7.26	8.20	9.42	10.76	Rated Power (kW)
♦	1	1	1	1	♦	1.5	1.5	1.5	1.5	1.5	Recommended power conn' size
Kt(Nm/A) = 2.4 Ke(V/Krpm) = 147											Speed 2000 (rpm)
8.60	15.30	21.40	25.70	29.60	16.50	28.00	42.50	45.30	52.90	56.00	Rated Torque (Nm)
4.21	7.25	10.42	13.13	15.83	7.50	13.30	21.67	25.83	30.63	35.42	Stall Current (A)
1.80	3.20	4.48	5.40	6.20	3.46	5.90	8.90	9.50	11.07	11.70	Rated Power (kW)
1	1	1	1	1	1	1.5	1.5	1.5	1.5	1.5	Recommended power conn' size
Kt(Nm/A) = 1.6 Ke(V/Krpm) = 98											Speed 3000 (rpm)
8.20	14.00	18.40	20.90	23.00	15.50	25.00	♦	♦	♦	♦	Rated Torque (Nm)
6.31	10.88	15.63	19.69	23.75	11.56	20.44	♦	♦	♦	♦	Stall Current (A)
2.58	4.40	5.78	6.57	7.23	4.87	7.85	♦	♦	♦	♦	Rated Power (kW)
1	1	1	1.5	1.5	1.5	1.5	♦	♦	♦	♦	Recommended power conn' size
Kt(Nm/A) = 1.2 Ke(V/Krpm) = 73.5											Speed 4000 (rpm)
♦	11.70	14.20	14.90	♦	♦	♦	♦	♦	♦	♦	Rated Torque (Nm)
♦	14.50	20.83	26.25	♦	♦	♦	♦	♦	♦	♦	Stall Current (A)
♦	4.89	5.90	6.26	♦	♦	♦	♦	♦	♦	♦	Rated Power (kW)
♦	1	1.5	1.5	♦	♦	♦	♦	♦	♦	♦	Recommended power conn' size
Kt(Nm/A) = 0.8 Ke(V/Krpm) = 49.0											Speed 6000 (rpm)
♦	7.00	♦	♦	♦	♦	♦	♦	♦	♦	♦	Rated Torque (Nm)
♦	21.75	♦	♦	♦	♦	♦	♦	♦	♦	♦	Stall Current (A)
♦	4.40	♦	♦	♦	♦	♦	♦	♦	♦	♦	Rated Power (kW)
♦	1.50	♦	♦	♦	♦	♦	♦	♦	♦	♦	Recommended power conn' size

♦ Not available

Unimotor hd range overview – Fan blown motors

3 Phase VPWM drives 380 - 480 V_{rms}


Motor frame size (mm)	115UF				142UF					190UF					
Frame Length	A	B	C	D	A	B	C	D	E	A	B	C	D	E	F
Continuous Stall torque (Nm)	◆	◆	19.00	24.60	◆	◆	36.00	44.80	56.00	◆	◆	69.50	83.40	102.20	123.70
Peak Torque (Nm)	◆	◆	43.80	56.40	◆	◆	75.00	94.50	120.00	◆	◆	156.00	186.00	219.00	255.00
Standard Inertia	◆	◆	6.39	8.38	◆	◆	17.00	22.10	27.20	◆	◆	54.60	70.90	87.20	103.50
Standard motor weight (kg)	◆	◆	12.14	13.93	◆	◆	14.64	17.29	19.94	◆	◆	30.84	37.40	44.96	51.52
High Inertia (kg cm ²)	◆	◆	13.70	16.63	◆	◆	40.10	48.50	56.80	◆	◆	144.90	172.60	200.20	227.90
High Inertia motor weight (kg)	◆	◆	12.00	13.79	◆	◆	16.54	19.19	21.84	◆	◆	33.44	40.00	47.56	54.12
Number of Poles	◆	◆	10	10	◆	◆	10	10	10	◆	◆	10	10	10	10
Speed 3000 (rpm)	Kt(Nm/A)=1.6 Ke(V/Krpm) = 98.0														
Rated Torque (Nm)	◆	◆	16.00	21.20	◆	◆	25.00	29.30	32.20	◆	◆	40.2	47.1	56.1	57.5
Stall Current (A)	◆	◆	12.00	15.00	◆	◆	23.00	28.00	35.00	◆	◆	43	52	64	77
Rated Power (kW)	◆	◆	4.93	6.70	◆	◆	7.90	9.20	10.10	◆	◆	12.6	14.8	17.6	18.1
Recommended power conn' size	◆	◆	1	1	◆	◆	1.5	1.5	1.5	◆	◆	Tbox	Tbox	Tbox	Tbox
Speed 4000 (rpm)	Kt(Nm/A) = 1.2 Ke(V/Krpm) = 73.5														
Rated Torque (Nm)	◆	◆	◆	◆	◆	◆	19.40	25.30	◆	◆	◆	◆	◆	◆	◆
Stall Current (A)	◆	◆	◆	◆	◆	◆	30.00	37.00	◆	◆	◆	◆	◆	◆	◆
Rated Power (kW)	◆	◆	◆	◆	◆	◆	8.10	10.60	◆	◆	◆	◆	◆	◆	◆
Recommended power conn' size	◆	◆	◆	◆	◆	◆	1.5	1.5	◆	◆	◆	◆	◆	◆	◆

◆ Not available



Unimotor hd

Ratings and dimensions

Frame size
060

Motor frame size (mm)				Motor frame size (mm)			
060ED				060UD			
Voltage (Vrms)				200-240			
Voltage (Vrms)				380-480			
Frame length				A B C			
Continuous stall torque (Nm)				0.64 1.28 1.92			
Peak torque (Nm)				2.24 4.48 6.72			
Standard inertia (kg cm ²)				0.18 0.33 0.48			
Winding thermal time constant (sec)				48 55 61			
Standard motor weight (kg)				1.6 2.0 2.2			
Number of poles				10 10 10			
Speed 3000 (rpm)				Speed 3000 (rpm)			
Rated Torque (Nm)				♦ ♦ ♦			
Stall current (A)				♦ ♦ ♦			
Rated power (kW)				♦ ♦ ♦			
R (ph-ph) (Ohms)				♦ ♦ ♦			
L (ph-ph) (mH)				♦ ♦ ♦			
Recommended power conn' size				♦ ♦ ♦			
Speed 6000 (rpm) Kt (Nm/A) = Ke (V/krpm) =				Speed 6000 (rpm) Kt (Nm/A) = Ke (V/krpm) =			
				0.47 28.5 0.8 49			
Rated torque (Nm)				0.64 1.28 1.92			
Stall current (A)				1.36 2.72 4.09			
Rated power (kW)				0.4 0.8 1.2			
R (ph-ph) (Ohms)				6.0 2.5 1.6			
L (ph-ph) (mH)				15.3 11.1 8.0			
Recommended power conn' size				Y-TEC			
Recommended power conn' size				Y-TEC			

All data subject to +/-10 % tolerance.

Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12 kHz drive switching frequency.

All other figures relate to a 20 °C motor temperature. Maximum intermittent winding temperature is 140 °C.



♦ Not available



Motor Dimensions														
Feedback CN					Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts	
Unbraked length		Braked length												
LB (± 0.9)	LC (± 1.0)	LB (± 1.0)	LC (± 1.0)											
060A	82.5	66.5	119.5	103.5	7.5	3	50	80	60	5.5	70	60	M5	mm
060B	102.5	86.5	139.5	123.5										
060C	122.5	106.5	159.5	143.5										

Shaft Dimensions								
Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth	
D(j6)	E	GA	GF	G	F(h9)	I	J(±1)	
14.0 Std	14	30	16	22	1.5	5	M5 x 0.8	13.5 mm

Feedback - EG, FG		
	Unbraked length	Braked length
	LB (± 0.9)	LB (± 0.9)
060A	100	137
060B	120	157
060C	140	177

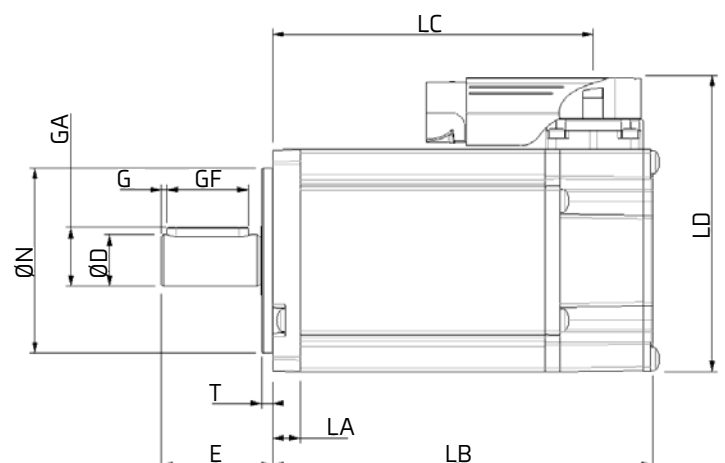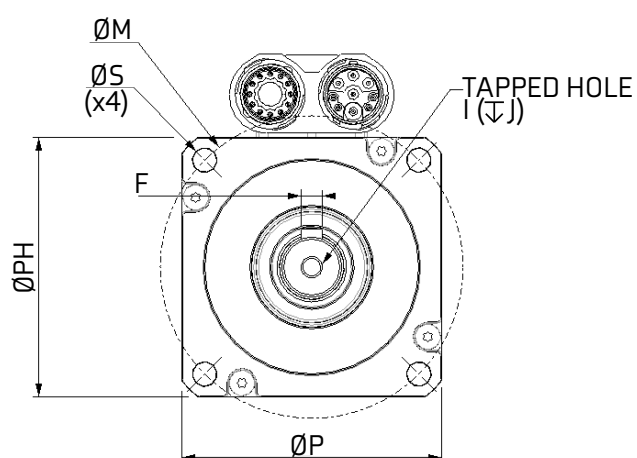

Frame size 067




Motor frame size (mm)		067ED			
Voltage (V _{rms})		200-240			
Frame length		A	B	C	D
Continuous stall torque (Nm)		1.44	2.55	3.70	4.72
Peak torque (Nm)		4.35	7.65	11.10	14.60
Standard inertia (kg cm ²)		0.36	0.59	0.81	0.94
Winding thermal time constant (s)		54	61	65	68
Standard motor weight (kg)		1.96	2.56	3.16	3.80
Number of poles		10	10	10	10
Speed 3000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	0.93 57			
Rated torque (Nm)		1.40	2.45	3.50	4.60
Stall current (A)		1.55	2.74	3.98	5.08
Rated power (kW)		0.44	0.77	1.10	1.45
R (ph-ph) (Ohms)		15.16	5.85	3.33	2.17
L (ph-ph) (mH)		46.7	20.6	12.7	8.13
Recommended power conn' size		1	1	1	1
Speed 6000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	0.47 28.5			
Rated torque (Nm)		1.3	2.2	3.1	4.0
Stall current (A)		3.06	5.43	7.87	10.04
Rated power (kW)		0.82	1.38	1.95	2.51
R (ph-ph) (Ohms)		3.79	1.46	0.76	0.54
L (ph-ph) (mH)		11.7	5.2	3.6	2.03
Recommended power conn' size		1	1	1	1

Motor frame size (mm)		067UD			
Voltage (V _{rms})		380-480			
Frame length		A	B	C	D
Continuous stall torque (Nm)		1.44	2.55	3.70	4.72
Peak torque (Nm)		4.35	7.65	11.10	14.60
Standard inertia (kg cm ²)		0.30	0.53	0.75	0.94
Winding thermal time constant (s)		54	61	65	68
Standard motor weight (kg)		1.96	2.56	3.16	3.80
Number of poles		10	10	10	10
Speed 3000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	0.8 49			
Rated torque (Nm)		1.40	2.45	3.50	4.60
Stall current (A)		1.80	1.59	2.31	2.95
Rated power (kW)		0.44	0.77	1.10	1.45
R (ph-ph) (Ohms)		11.69	18.55	10.70	6.42
L (ph-ph) (mH)		35.2	65.6	40.8	24.4
Recommended power conn' size		1	1	1	1
Speed 6000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	0.8 49			
Rated torque (Nm)		1.3	2.2	3.1	4.0
Stall current (A)		1.80	3.19	4.63	5.90
Rated power (kW)		0.82	1.38	1.95	2.51
R (ph-ph) (Ohms)		11.69	4.64	2.73	1.60
L (ph-ph) (mH)		35.2	16.4	10.2	6.1
Recommended power conn' size		1	1	1	1

All data subject to +/-10 % tolerance. Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12 kHz drive switching frequency. All other figures relate to a 20 °C motor temperature. Maximum intermittent winding temperature is 140 °C.

Motor Dimensions														
Feedback AR, CR, EG, FG					Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts	
Unbraked length		Braked length												
LB (± 0.9)	LC (± 1.0)	LB (± 1.0)	LC (± 1.0)	LA (± 0.5)										
067A	142.9	109	177.9	144	7.7	2.5	60	111.5	70	5.8	75	67	M5	mm
067B	172.9	139	207.9	174										
067C	202.9	169	237.9	204										
067D	232.9	199	267.9	234										

Shaft Dimensions									
	Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth	
	D(j6)	E	GA	GF	G	F(h9)	I	J(±1)	
14.0 Std	14	30	16	25	1.5	5	M5 x 0.8	13.5	mm

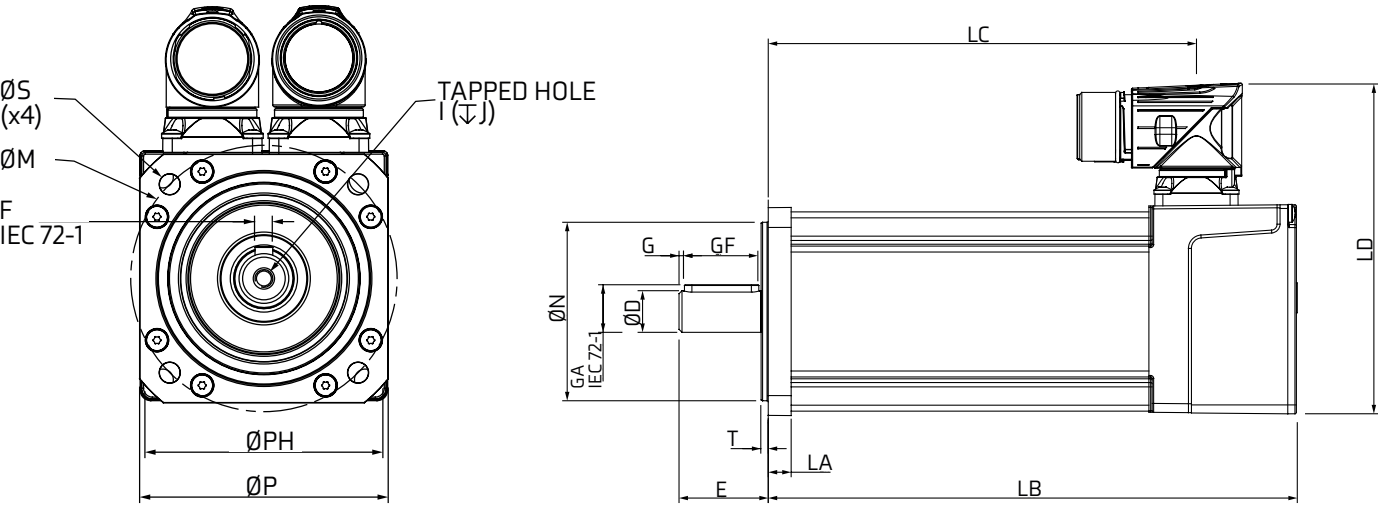

Frame size 089



Motor frame size (mm)		089ED			
Voltage (V _{rms})		200-240			
Frame length		A	B	C	D
Continuous stall torque (Nm)		3.2	5.5	8.0	10.3
Peak torque (Nm)		9.6	16.5	24.0	30.9
Standard inertia (kg cm ²)		0.87	1.61	2.34	3.20
Winding thermal time constant (s)		85	93	98	103
Standard motor weight (kg)		3.18	4.28	5.38	6.48
Number of poles		10	10	10	10
Speed 3000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	0.93 57			
Rated torque (Nm)		3.00	4.85	6.90	◆
Stall current (A)		3.44	5.91	8.60	◆
Rated power (kW)		0.94	1.52	2.17	◆
R (ph-ph) (Ohms)		4.1	1.64	0.93	◆
L (ph-ph) (mH)		25.0	11.8	7.1	◆
Recommended power conn' size		1	1	1	◆
Speed 4000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	0.47 42.75			
Rated torque (Nm)		2.9	4.55	6.35	◆
Stall current (A)		5	7.86	11.43	◆
Rated power (kW)		1.2	1.91	2.66	◆
R (ph-ph) (Ohms)		2.1	0.82	0.56	◆
L (ph-ph) (mH)		12.8	6	4.3	◆
Recommended power conn' size		1	1	1	◆
Speed 6000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	0.47 28.5			
Rated torque (Nm)		2.65	3.80	5.00	◆
Stall current (A)		6.93	11.70	17.02	◆
Rated power (kW)		1.67	2.39	3.14	◆
R (ph-ph) (Ohms)		1.03	0.41	0.24	◆
L (ph-ph) (mH)		6.2	2.96	1.77	◆
Recommended power conn' size		1	1	1	◆

Motor frame size (mm)		089UD			
Voltage (V _{rms})		380-480			
Frame length		A	B	C	D
Continuous stall torque (Nm)		3.2	5.5	8.0	10.3
Peak torque (Nm)		9.6	16.5	24.0	31.5
Standard inertia (kg cm ²)		0.87	1.61	2.34	3.20
Winding thermal time constant (s)		85	93	98	103
Standard motor weight (kg)		3.18	4.28	5.38	6.48
Number of poles		10	10	10	10
Speed 3000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	1.6 98			
Rated torque (Nm)		3.00	4.85	6.90	8.50
Stall current (A)		2.00	3.44	5.00	6.44
Rated power (kW)		0.94	1.52	2.17	2.67
R (ph-ph) (Ohms)		10.80	5.18	2.79	1.89
L (ph-ph) (mH)		66.8	36.7	21.7	15.3
Recommended power conn' size		1	1	1	1
Speed 4000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	1.2 73.5			
Rated torque (Nm)		2.9	4.55	6.35	◆
Stall current (A)		3	4.58	6.67	◆
Rated power (kW)		1.2	1.91	2.66	◆
R (ph-ph) (Ohms)		6.5	2.60	1.80	◆
L (ph-ph) (mH)		39.8	18.8	13.4	◆
Recommended power conn' size		1	1	1	◆
Speed 6000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	0.8 49			
Rated torque (Nm)		2.65	3.80	5.00	◆
Stall current (A)		4.00	6.88	10.00	◆
Rated power (kW)		1.67	2.39	3.14	◆
R (ph-ph) (Ohms)		2.70	1.30	0.67	◆
L (ph-ph) (mH)		16.7	9.2	5.4	◆
Recommended power conn' size		1	1	1	◆


All data subject to +/-10 % tolerance. Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12kHz drive switching frequency. All other figures relate to a 20 °C motor temperature. Maximum intermittent winding temperature is 140 °C.

◆ Not available

Motor Dimensions														
Feedback EF, FF					Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts	
Unbraked length		Braked length												
	LB (± 0.9)	LC (± 1.0)	LB (± 1.0)	LC (± 1.0)	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)		
089A	147.8	110.5	187.9	150.6	10.3	2.2	80	130.5	91	7	100	89	M6	mm
089B	177.8	140.5	217.9	180.6										
089C	207.8	170.5	247.9	210.6										
089D	237.8	200.5	277.9	240.6										

Feedback CA, GF, HF, EZ		Feedback AE		
Unbraked length	Braked length	Unbraked length	Braked length	
LB (± 0.9)	LB (± 0.9)	LB (± 0.9)	LB (± 0.9)	
089A	160.8	200.9	137.8	177.9
089B	190.8	230.9	167.8	207.9
089C	220.8	260.9	197.8	237.9
089D	250.8	290.9	227.8	267.9

Shaft Dimensions									
	Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth	
	D(j6)	E	GA	GF	G	F(h9)	I	J(±1)	
19.0 Std	19	40	21.5	32	3.7	6	M6 x 1	17	mm

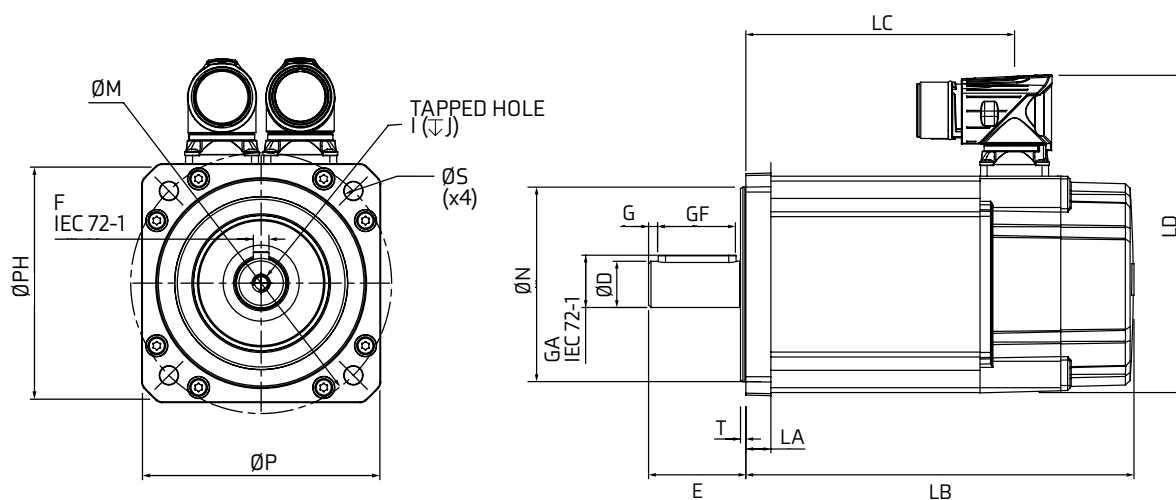

Frame size 115



Motor frame size (mm)		115ED			
Voltage (Vrms)		200-240			
Frame Length		A	B	C	D
Continuous stall torque (Nm)		5.8	10.2	14.6	18.8
Peak torque (Nm)		17.4	30.6	43.8	56.4
Standard inertia (kg cm ²)		2.40	4.41	6.39	8.38
Winding thermal time constant (s)		161	164	168	175
Standard motor weight (kg)		5.20	6.95	8.72	10.49
Number of poles		10	10	10	10
Speed 2000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	1.4 85.5			
Rated torque (Nm)	♦	8.6	11.9	15.6	
Stall current (A)	♦	7	10.43	13.43	
Rated power (kW)	♦	1.8	2.49	3.27	
R (ph-ph) (Ohms)	♦	1.2	0.77	0.61	
L (ph-ph) (mH)	♦	11	7.9	6.6	
Recommended power conn' size	♦	1	1	1	
Speed 3000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	0.93 57			
Rated torque (Nm)	4.8	7.7	10.5	♦	
Stall current (A)	6.24	10.97	15.70	♦	
Rated power (kW)	1.51	2.42	3.30	♦	
R (ph-ph) (Ohms)	1.59	0.58	0.39	♦	
L (ph-ph) (mH)	12.8	5.4	4.0	♦	
Recommended power conn' size	1	1	1	♦	
Speed 4000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	0.7 42.75			
Rated torque (Nm)	♦	♦	♦	♦	
Stall current (A)	♦	♦	♦	♦	
Rated power (kW)	♦	♦	♦	♦	
R (ph-ph) (Ohms)	♦	♦	♦	♦	
L (ph-ph) (mH)	♦	♦	♦	♦	
Recommended power conn' size	♦	♦	♦	♦	
Speed 6000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	0.47 28.5			
Rated torque (Nm)	♦	♦	♦	♦	
Stall current (A)	♦	♦	♦	♦	
Rated power (kW)	♦	♦	♦	♦	
R (ph-ph) (Ohms)	♦	♦	♦	♦	
L (ph-ph) (mH)	♦	♦	♦	♦	
Recommended power conn' size	♦	♦	♦	♦	

Motor frame size (mm)		115UD			
Voltage (Vrms)		380-480			
Frame length		A	B	C	D
Continuous stall torque (Nm)		5.8	10.2	14.6	18.8
Peak torque (Nm)		17.4	30.6	43.8	56.4
Standard inertia (kg cm ²)		2.40	4.41	6.39	8.38
Winding thermal time constant (s)		161	164	168	175
Standard motor weight (kg)		5.20	6.95	8.72	10.49
Number of poles		10	10	10	10
Speed 2000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	2.4 147			
Rated torque (Nm)	♦	8.6	11.9	15.6	
Stall current (A)	♦	4	6.08	7.83	
Rated power (kW)	♦	1.8	2.49	3.27	
R (ph-ph) (Ohms)	♦	4.4	2.41	1.80	
L (ph-ph) (mH)	♦	40.6	24.7	19.5	
Recommended power conn' size	♦	1	1	1	
Speed 3000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	1.6 98			
Rated torque (Nm)	4.8	7.7	10.5	13.6	
Stall current (A)	3.63	6.38	9.13	11.75	
Rated power (kW)	1.51	2.42	3.30	4.27	
R (ph-ph) (Ohms)	5.00	1.90	1.21	0.78	
L (ph-ph) (mH)	40.3	18.0	12.7	8.7	
Recommended power conn' size	1	1	1	1	
Speed 4000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	1.2 73.5			
Rated torque (Nm)	4.5	6.7	8.7	10.5	
Stall current (A)	5	9	12.1	16	
Rated power (kW)	1.9	2.81	3.64	4.4	
R (ph-ph) (Ohms)	2.8	1.07	0.6	0.4	
L (ph-ph) (mH)	23.1	10.15	6.6	4.7	
Recommended power conn' size	1	1	1	1	
Speed 6000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =	0.8 49			
Rated torque (Nm)	3.6	4.8	♦	♦	
Stall current (A)	7.25	12.75	♦	♦	
Rated power (kW)	2.26	3.02	♦	♦	
R (ph-ph) (Ohms)	1.25	0.47	♦	♦	
L (ph-ph) (mH)	10.1	4.5	♦	♦	
Recommended power conn' size	1	1	♦	♦	


All data subject to +/-10 % tolerance. Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12 kHz drive switching frequency. All other figures relate to a 20 °C motor temperature. Maximum intermittent winding temperature is 140 °C.

♦ Not available


Motor Dimensions														
Feedback EF, FF					Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts	
Unbraked length		Braked length												
	LB (± 0.9)	LC (± 1.0)	LB (± 1.0)	LC (± 1.0)	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)		
115A	163.8	124	200.9	161.1	13.2	2.7	110	156.5	116	10	130	115		
115B	193.8	154	230.9	191.1										
115C	223.8	184	260.9	221.1										
115D	253.8	214	290.9	251.1										

Shaft Dimensions									
		Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth
		D(j6)	E	GA	GF	G	F(h9)	I	J(±1)
24.0 Std		24	50	27	40	5.3	8	M8 x 1.25	20 mm

	Feedback CA, GF, HF, EZ		Feedback AE		
	Unbraked length	Braked length	Unbraked length	Braked length	
	LB (± 0.9)	LB (± 0.9)	LB (± 0.9)	LB (± 0.9)	
115A	176.8	213.9	153.8	190.9	mm
115B	206.8	243.9	183.8	220.9	
115C	236.8	273.9	213.8	250.9	
115D	266.8	303.9	243.8	280.9	

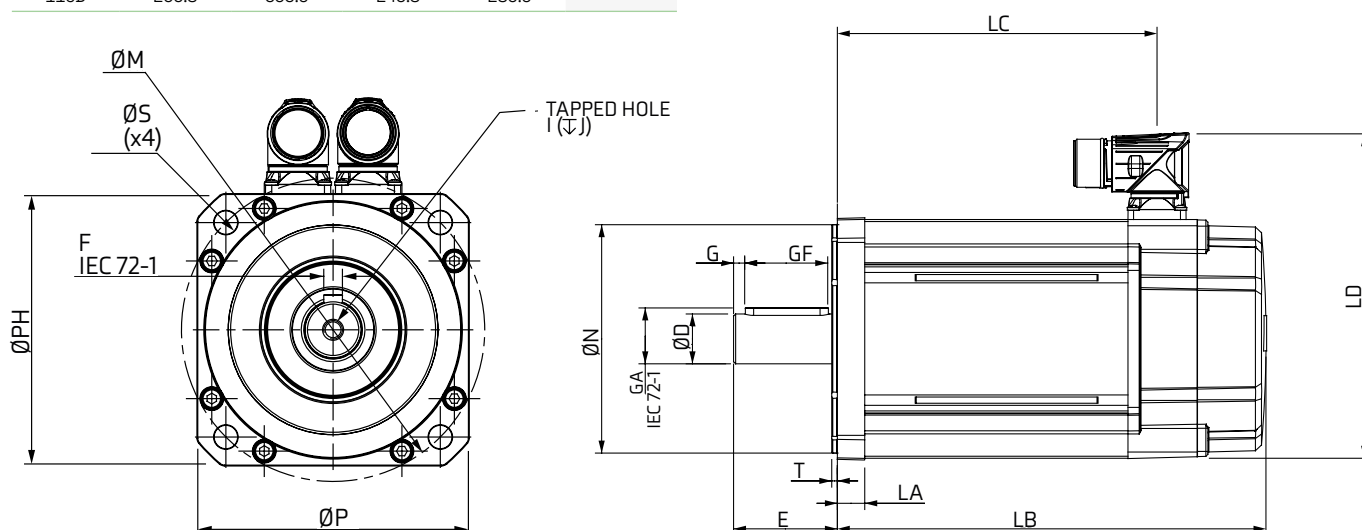


Frame size 115UF Fan blown

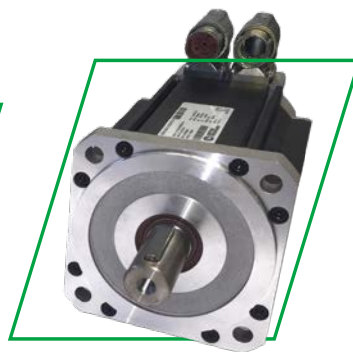

Motor frame size (mm)		115UF			
Voltage (Vrms)		380-480			
Frame Length		A	B	C	D
Continuous stall torque (Nm)		◆	◆	19.0	24.6
Peak torque (Nm)		◆	◆	43.8	56.4
Standard inertia (kg cm ²)		◆	◆	6.4	8.4
Winding thermal time constant (s)		◆	◆	168.0	175.0
Standard motor weight (kg)		◆	◆	12.1	13.9
Number of poles		◆	◆	10	10

Motor frame size (mm)		115UF			
Voltage (Vrms)		380-480			
Speed	Kt (Nm/A) = Ke (V/krpm) =	1.6 98			
3000 (rpm)					
Frame length		A	B	C	D
Rated torque (Nm)		◆	◆	16	21.0
Stall current (A)		◆	◆	12.00	15.00
Rated power (kW)		◆	◆	5.00	6.70
R (ph-ph) (Ohms)		◆	◆	1.21	0.78
L (ph-ph) (mH)		◆	◆	12.7	8.7
Recommended power conn' size		◆	◆	1	1

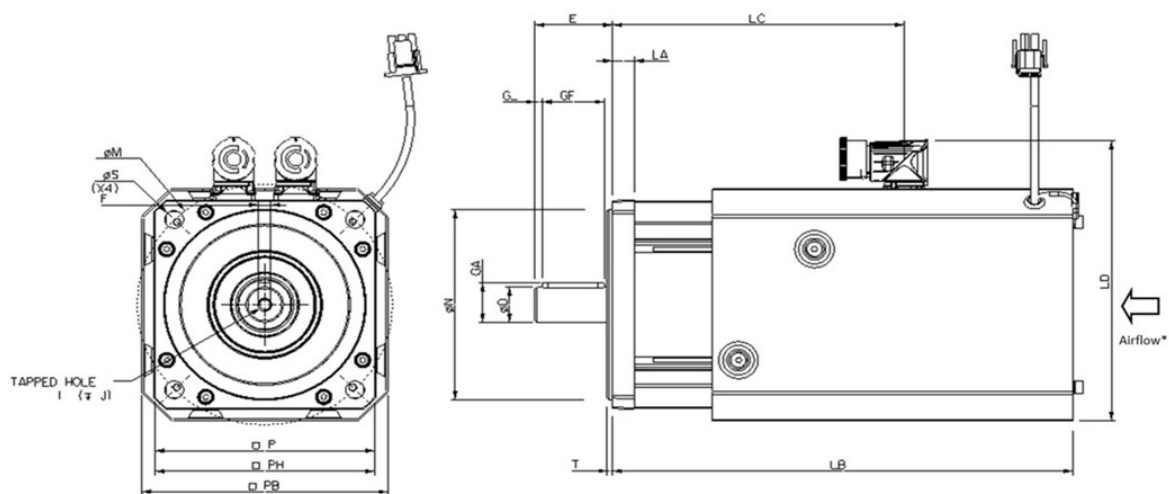

Motor Dimensions																	
Feedback EF, FF		Feedback CA, EZ, GF, HF		Feedback AE		Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts	Fanbox PB		
Unbraked length	Braked length	Unbraked length	Braked length	Unbraked length	Braked length												
	LB(±0.9)	LB(±1.0)	LB(±0.9)	LB(±0.9)	LB(±0.9)	LB(±0.9)	LA (±0.5)	T(±0.1)	N(6)	LD(±0.3)	P(±0.3)	S(H14)	M(±0.5)	PH(±0.5)			
115C	273.8	310.9	286.8	323.9	263.8	300.9	13.2	2.7	110.0	164.8	116.0	10.0	130.0	115.0	M8	132	mm
115D	303.8	340.9	316.8	353.9	293.8	330.9											


Shaft Dimensions								
	Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth
	D(6)	E	GA	GF	G	F(h9)	I	J(±1)
24.0 Std	24	50	27	40	5.3	8	M8 x 1.25	20 mm

◆ Not available

All data subject to +/-10 % tolerance. Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12 kHz drive switching frequency. All other figures relate to a 20 °C motor temperature. Maximum intermittent winding temperature is 140 °C.



Frame size 142

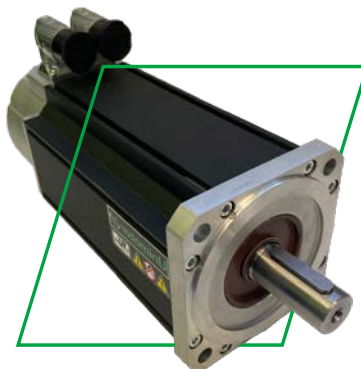

Motor frame size (mm)		142ED				
Voltage (V _{rms})		200-240				
Frame length		A	B	C	D	E
Continuous stall torque (Nm)		10.1	17.4	25.0	31.5	38.0
Peak torque (Nm)		30.3	52.2	75.0	94.5	114.0
Standard inertia (kg cm ²)		5.6	11.0	17.0	22.1	27.2
Winding thermal time constant (s)		235	240	245	251	256
Standard motor weight (kg)		7.40	10.10	12.74	15.39	18.04
Number of poles		10	10	10	10	10
Speed 2000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	1.4 85.5				
Rated torque (Nm)		8.6	15.3	21.4	25.7	29.6
Stall current (A)		7.21	12.43	17.86	23	27.14
Rated power (kW)		1.80	3.20	4.48	5.4	6.20
R (ph-ph) (Ohms)		0.85	0.34	0.24	0.2	0.2
L (ph-ph) (mH)		11.1	2.1	5.2	3.8	2.9
Recommended power conn' size		1	1	1.5	1.5	1.5
Speed 3000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	0.93 57				
Rated torque (Nm)		8.2	14.0	18.4	20.9	♦
Stall current (A)		10.86	18.71	26.88	33.87	♦
Rated power (kW)		2.58	4.40	5.78	6.57	♦
R (ph-ph) (Ohms)		0.38	0.22	0.12	0.09	♦
L (ph-ph) (mH)		6.3	2.8	1.9	1.6	♦
Recommended power conn' size		1	1.5	1.5	1.5	♦
Speed 4000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	0.7 42.75				
Rated torque (Nm)		♦	11.7	♦	♦	♦
Stall current (A)		♦	24.86	♦	♦	♦
Rated power (kW)		♦	4.90	♦	♦	♦
R (ph-ph) (Ohms)		♦	0.08	♦	♦	♦
L (ph-ph) (mH)		♦	4.5	♦	♦	♦
Recommended power conn' size		♦	1.5	♦	♦	♦
Speed 6000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	0.47 28.5				
Rated torque (Nm)		♦	♦	♦	♦	♦
Stall current (A)		♦	♦	♦	♦	♦
Rated power (kW)		♦	♦	♦	♦	♦
R (ph-ph) (Ohms)		♦	♦	♦	♦	♦
L (ph-ph) (mH)		♦	♦	♦	♦	♦
Recommended power conn' size		♦	♦	♦	♦	♦


Motor frame size (mm)		142UD				
Voltage (V _{rms})		380-480				
Frame length		A	B	C	D	E
Continuous stall torque (Nm)		10.1	17.4	25.0	31.5	38.0
Peak torque (Nm)		30.3	52.2	75.0	94.5	114.0
Standard inertia (kg cm ²)		6.8	11.9	17.0	22.1	27.2
Winding thermal time constant (s)		235	240	245	251	256
Standard motor weight (kg)		7.40	10.10	12.74	15.39	18.04
Number of poles		10	10	10	10	10
Speed 1500 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	3.2 196				
Rated torque (Nm)		♦	27	22.3	27.0	31.70
Stall current (A)		♦	10	8	9.84	11.8
Rated power (kW)		♦	4.2	3.5	4.24	4.98
R (ph-ph) (Ohms)		♦	0.9	1.4	0.9	0.7
L (ph-ph) (mH)		♦	15.2	21.3	15.2	12.3
Recommended power conn' size		♦	1	1	1	1
Speed 2000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	2.4 147				
Rated torque (Nm)		8.6	15.3	21.4	25.7	29.6
Stall current (A)		4.21	7.25	10.42	13	16
Rated power (kW)		1.80	3.20	4.48	5.4	6.2
R (ph-ph) (Ohms)		3.90	1.53	0.79	0.6	0.5
L (ph-ph) (mH)		46.28	20.97	12.15	9.9	8.3
Recommended power conn' size		1	1	1	1	1
Speed 3000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	1.6 98				
Rated torque (Nm)		8.2	14.0	18.4	20.9	23.0
Stall current (A)		6.31	10.88	15.63	19.69	23.75
Rated power (kW)		2.58	4.40	5.78	6.57	7.23
R (ph-ph) (Ohms)		1.50	0.63	0.34	0.24	0.18
L (ph-ph) (mH)		18.1	8.6	5.3	3.8	2.9
Recommended power conn' size		1	1	1	1.5	1.5
Speed 4000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	1.2 74				
Rated torque (Nm)		♦	11.7	14.2	14.9	♦
Stall current (A)		♦	14.50	21	26.25	♦
Rated power (kW)		♦	4.90	5.9	6.24	♦
R (ph-ph) (Ohms)		♦	0.36	0.2	0.16	♦
L (ph-ph) (mH)		♦	7.1	3.0	2.4	♦
Recommended power conn' size		♦	1	1.5	1.5	♦
Speed 6000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	0.8 49				
Rated torque (Nm)		♦	7	♦	♦	♦
Stall current (A)		♦	21.75	♦	♦	♦
Rated power (kW)		♦	4.4	♦	♦	♦
R (ph-ph) (Ohms)		♦	0.17	♦	♦	♦
L (ph-ph) (mH)		♦	3.2	♦	♦	♦
Recommended power conn' size		♦	1.5	♦	♦	♦

All data subject to +/-10 % tolerance. Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12 kHz drive switching frequency. All other figures relate to a 20 °C motor temperature. Maximum intermittent winding temperature is 140 °C.


♦ Not available

Motor Dimensions													
	Unbraked length		Braked length		Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts
	LB (± 0.9)	LC (± 1.0)	LB (± 1.0)	LC (± 1.0)	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
142A	157	122.5	222.5	188	14	3.4	130	183.5 (Size 1)	142	12	165	142	M10
142B	187	152.5	252.5	218									
142C	217	182.5	282.5	248									
142D	247	212.5	312.5	278									
142E	277	242.5	342.5	308				204.5 (Size 1.5)					mm

Shaft Dimensions									
	Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth	
	D(j6)	E	GA	GF	G	F(h9)	I	J(±1)	
32.0 Std	32	58	35	50	3	10	M12 x 1.75	29	mm

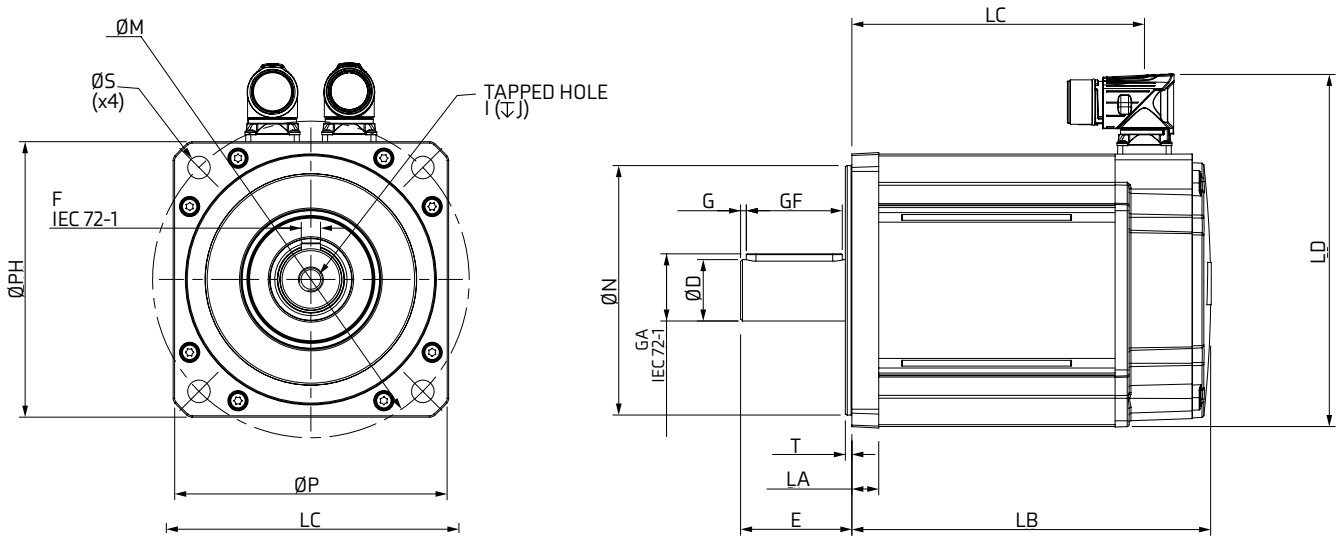

Frame size 142 Fan blown

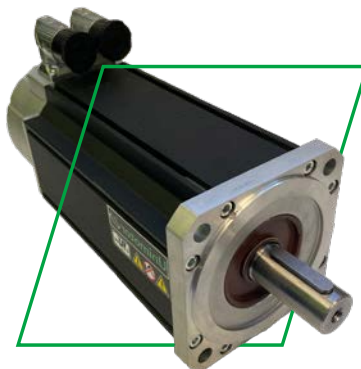


Motor frame size (mm)						142UF
Voltage (V _{rms})						380-480
Frame Length		A	B	C	D	E
Continuous stall torque (Nm)		◆	◆	36	44.8	56
Peak torque (Nm)		◆	◆	75	94.5	120
Standard inertia (kg cm ²)		◆	◆	17	22.1	27.2
Winding thermal time constant (s)		◆	◆	245	251	256
Standard motor weight (kg)		◆	◆	14.64	17.29	19.94
Number of Poles		◆	◆	10	10	10
Speed 3000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =			1.6 98		
Rated torque (Nm)		◆	◆	25	29.3	32.2
Stall current (A)		◆	◆	23	28	35
Rated power (kW)		◆	◆	7.9	9.2	10.1
R (ph-ph) (Ohms)		◆	◆	0.3	0.2	0.2
L (ph-ph) (mH)		◆	◆	5.3	3.8	2.9
Recommended power conn' size		◆	◆	1.5	1.5	1.5
Speed 4000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =			1.2 73.5		
Rated torque (Nm)		◆	◆	19.4	25.3	◆
Stall current (A)		◆	◆	30	37	◆
Rated power (kW)		◆	◆	8.1	10.6	◆
R (ph-ph) (Ohms)		◆	◆	0.2	0.2	◆
L (ph-ph) (mH)		◆	◆	3	2.4	◆
Recommended power conn' size		◆	◆	1.5	1.5	◆

Motor Dimensions												
Feedback EF, FF, AE, EZ, CA			Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Fanbox PB	Mounting bolts
Unbraked length	Braked length											
LB(±0.9)	LB(±1.0)		LA (±0.5)	T(±0.1)	N(j6)	LD(±0.3)	P(±0.3)	S(H14)	M(±0.5)	PH(±0.5)		
142C	267.0	332.5										
142D	297.0	362.5	14.0	3.4	130.0	212.8	142.0	12.0	165.0	142.0	159	M10 mm
142E	327.0	392.5										


Shaft Dimensions								
	Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth
	D(j6)	E	GA	GF	G	F(h9)	I	J(±1)
32.0 Std	32.0	58.0	35.0	50.0	3.0	10.0	M12x1.75	29.0 mm

All data subject to +/-10 % tolerance. Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12 kHz drive switching frequency. All other figures relate to a 20 °C motor temperature. Maximum intermittent winding temperature is 140 °C.

◆ Not available

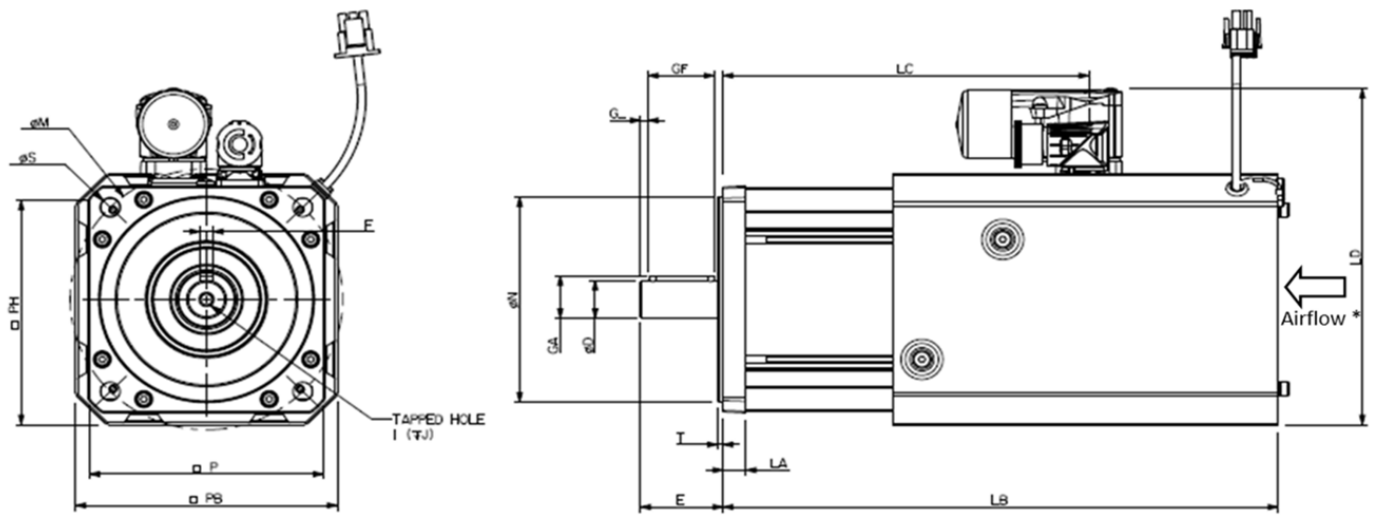

Frame size 190

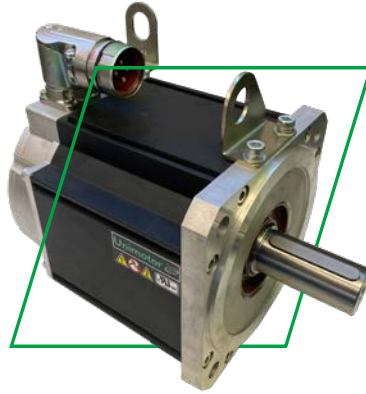

Motor frame size (mm)		190ED					
Voltage (V _{rms})		200-240					
Frame length		A	B	C	D	E	F
Continuous stall torque (Nm)		18.5	32.7	52.0	62.0	73.5	85.0
Peak torque (Nm)		55.50	98.10	156	186	220.5	255
Standard inertia (kg cm ²)		22.00	38.30	54.60	70.85	87.20	103.5
Winding thermal time constant (s)		286	292	300	308	316	324
Standard motor weight (kg)		14.60	21.20	27.74	34.30	40.90	47.42
Number of poles		10	10	10	10	10	10
Speed 1000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	2.8 171					
Rated torque (Nm)		♦	♦	49.0	56.5	♦	77.5
Stall current (A)		♦	♦	18.57	22.14	♦	30.36
Rated power (kW)		♦	♦	5.13	5.92	♦	8.12
R (ph-ph) (Ohms)		♦	♦	0.30	0.27	♦	0.15
L (ph-ph) (mH)		♦	♦	10.0	7.1	♦	4.8
Recommended power conn' size		♦	♦	1.5	1.5	♦	1.5
Speed 1500 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	1.86 114					
Rated torque (Nm)		♦	♦	46.2	♦	♦	♦
Stall current (A)		♦	♦	25.97	♦	♦	♦
Rated power (kW)		♦	♦	7.26	♦	♦	♦
R (ph-ph) (Ohms)		♦	♦	0.11	♦	♦	♦
L (ph-ph) (mH)		♦	♦	3.5	♦	♦	♦
Recommended power conn' size		♦	♦	1.5	♦	♦	♦
Speed 2000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	1.4 85.5					
Rated torque (Nm)		♦	♦	42.5	♦	♦	♦
Stall current (A)		♦	♦	37.14	♦	♦	♦
Rated power (kW)		♦	♦	8.90	♦	♦	♦
R (ph-ph) (Ohms)		♦	♦	0.09	♦	♦	♦
L (ph-ph) (mH)		♦	♦	2.5	♦	♦	♦
Recommended power conn' size		♦	♦	1.5	♦	♦	♦
Speed 3000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	0.93 57					
Rated torque (Nm)		15.5	25.0	♦	♦	♦	♦
Stall current (A)		19.89	35.16	♦	♦	♦	♦
Rated power (kW)		4.87	7.85	♦	♦	♦	♦
R (ph-ph) (Ohms)		0.20	0.05	♦	♦	♦	♦
L (ph-ph) (mH)		3.1	1.6	♦	♦	♦	♦
Recommended power conn' size		1.5	1.5	♦	♦	♦	♦


Motor frame size (mm)		190UD					
Voltage (V _{rms})		380-480					
Frame length		A	B	C	D	E	F
Continuous stall torque (Nm)		18.5	32.7	52.0	62.0	73.5	85.0
Peak torque (Nm)		55.5	98.10	156	186	220.5	255
Standard inertia (kg cm ²)		22.0	38.3	54.6	70.9	87.2	103.5
Winding thermal time constant (s)		286	292	300	308	316	324
Standard motor weight (kg)		14.60	21.20	27.74	34.30	40.90	47.42
Number of poles		10	10	10	10	10	10
Speed 1000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	4.8 296					
Rated torque (Nm)		♦	♦	49.00	56.50	♦	78.3
Stall current (A)		♦	♦	10.90	13.00	♦	17.61
Rated power (kW)		♦	♦	5.13	5.92	♦	8.12
R (ph-ph) (Ohms)		♦	♦	1.10	0.71	♦	0.53
L (ph-ph) (mH)		♦	♦	29.00	19.30	♦	15.8
Recommended power conn' size		♦	♦	1.5	1.5	♦	1.5
Speed 1500 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	3.2 196					
Rated torque (Nm)		♦	30.00	46.20	52.20	63.00	68.50
Stall current (A)		♦	10.00	16.25	19.00	22.90	26.56
Rated power (kW)		♦	4.70	7.26	8.20	9.42	10.76
R (ph-ph) (Ohms)		♦	1.00	0.55	0.40	0.30	0.23
L (ph-ph) (mH)		♦	22.8	14.2	10.40	8.7	6.80
Recommended power conn' size		♦	1.5	1.5	1.5	1.5	1.5
Speed 2000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	2.4 147					
Rated torque (Nm)		16.50	28.0	42.5	45.3	52.9	56.0
Stall current (A)		7.50	13.00	21.67	25.83	30.63	35.42
Rated power (kW)		3.46	5.90	8.90	9.49	11.08	11.73
R (ph-ph) (Ohms)		1.30	0.40	0.32	0.17	0.16	0.14
L (ph-ph) (mH)		23.90	10.7	8.2	5.1	4.6	4.3
Recommended power conn' size		1.5	1.5	1.5	1.5	1.5	1.5
Speed 3000 (rpm)	K _t (Nm/A) = K _e (V/krpm) =	1.6 98					
Rated torque (Nm)		15.5	25.0	♦	♦	♦	♦
Stall current (A)		11.56	20.44	♦	♦	♦	♦
Rated power (kW)		4.87	7.85	♦	♦	♦	♦
R (ph-ph) (Ohms)		0.57	0.23	♦	♦	♦	♦
L (ph-ph) (mH)		11.6	5.7	♦	♦	♦	♦
Recommended power conn' size		1.5	1.5	♦	♦	♦	♦

All data subject to +/-10 % tolerance. Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12 kHz drive switching frequency. All other figures relate to a 20 °C motor temperature. Maximum intermittent winding temperature is 140 °C.


♦ Not available

Motor Dimensions														
	Unbraked length		Braked length		Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts	
	LB (± 0.9)	LC (± 1.0)	LB (± 1.0)	LC (± 1.0)	LA (± 0.5)	T (± 0.1)	N (J6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)		
190A	160.6	131.1	259.1	229.1	18.5	3.9	180	252.5	190.3	14.5	215	190	M12	mm
190B	190.6	161.1	289.1	259.1										
190C	220.6	191.1	319.1	289.1										
190D	250.6	221.1	349.1	319.1										
190E	280.6	251.1	379.1	349.1										
190F	310.6	281.1	409.1	379.1										

Shaft Dimensions									
	Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth	
	D(J6)	E	GA	GF	G	F(h9)	I	J(± 1)	
38.0 Std	38	80	41	70	4.6	10	M12 x 1.75	29	mm

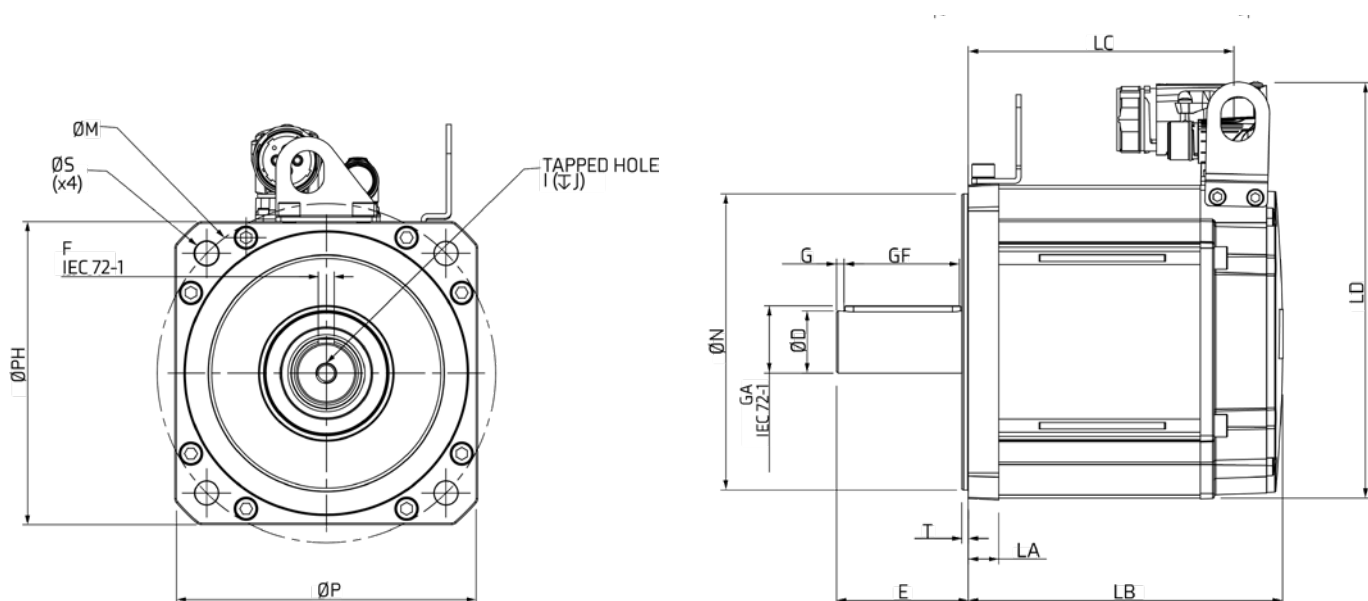

Frame size 190 Fan Blown

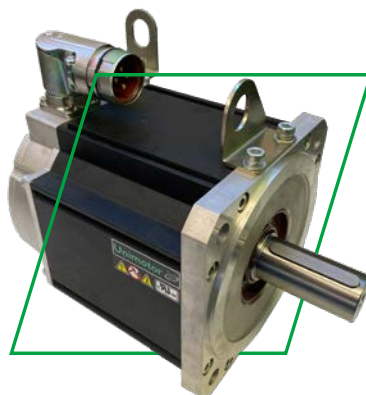



Motor frame size (mm)				190UF			
Voltage (Vrms)				380-480			
Frame length	A	B	C	D	E	F	
Continuous stall torque (Nm)	◆	◆	69.5	83.4	102.2	123.7	
Peak torque (Nm)	◆	◆	156	186	219	255	
Standard inertia (kg cm ²)	◆	◆	54.6	70.9	87.2	103.5	
Winding thermal time constant (s)	◆	◆	300	308	316	324	
Standard motor weight (Kg)	◆	◆	30.84	37.4	44.96	51.52	
Number of Poles	◆	◆	10	10	10	10	
Speed 3000 (rpm)	Kt (Nm/A) = Ke (V/krpm) =		1.6 98				
Rated torque (Nm)	◆	◆	40.2	47.1	56.1	57.5	
Stall current (A)	◆	◆	43	52	64	77	
Rated power (kW)	◆	◆	12.6	14.8	17.6	18.1	
R (ph-ph) (Ohms)	◆	◆	0.1	0.1	0.1	0.1	
L (ph-ph) (mH)	◆	◆	3.1	2.7	1.8	1.6	
Recommended power conn' size	◆	◆	Tbox	Tbox	Tbox	Tbox	

Motor Dimensions												
Feedback EF, FF, CA, GF, AE, EZ, HF		Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Fanbox PB	Mounting bolts	
Unbraked length	Braked length											
LB(±0.9)	LB(±1.0)	LA (±0.5)	T(±0.1)	N(j6)	LD(±0.3)	P(±0.3)	S(H14)	M(±0.5)	PH(±0.5)			
190C	339.6	438.1										
190D	369.6	468.1										
190E	399.6	498.1	18.5	3.9	180.0	371.8	190.3	14.5	215.0	190.0	207	M12 mm
190F	429.6	528.1										

Shaft Dimensions								
	Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth
	D(j6)	E	GA	GF	G	F(h9)	I	J(±1)
38.0 Std	32.0	58.0	35.0	50.0	3.0	10.0	M12x1.75	29.0 mm

All data subject to +/-10 % tolerance. Stall torque, rated torque and power relate to maximum continuous operation tested in a 20 °C ambient at 12 kHz drive switching frequency. All other figures relate to a 2 °C motor temperature. Maximum intermittent winding temperature is 140 °C.


◆ Not available

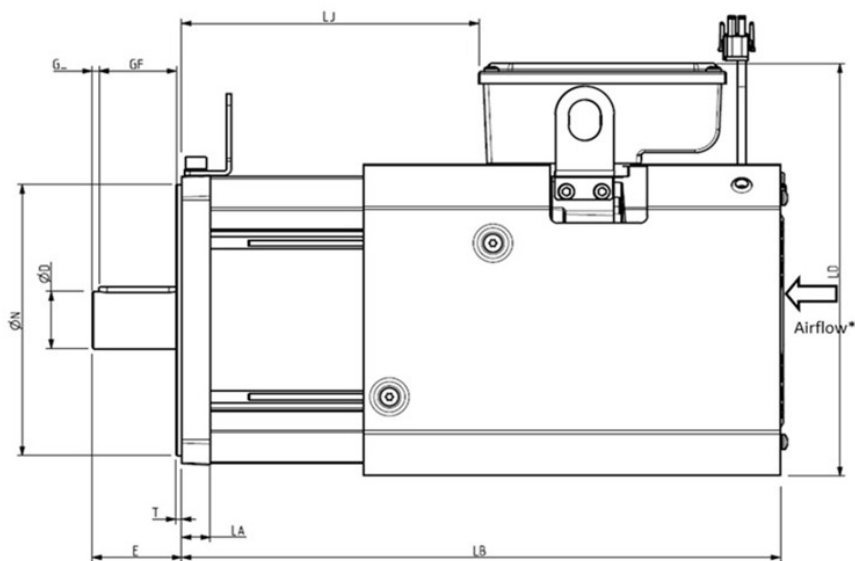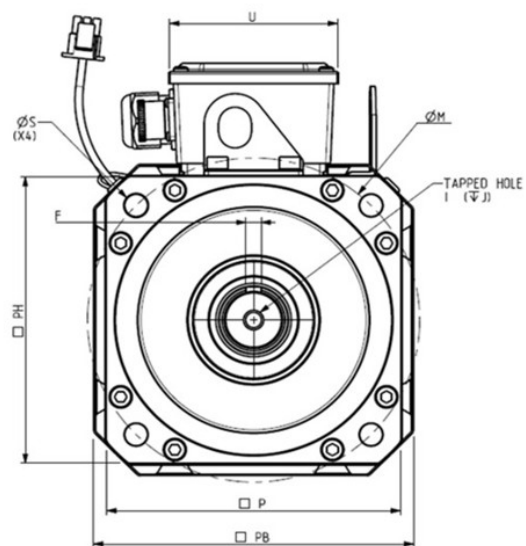

Dimensions - high inertia versions (JSHJ)

(all measurements shown are in mm)

067	Unbraked length		Braked length		Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts
	LB (± 0.9)	LC (± 1.0)	LB (± 0.9)	LC (± 1.0)	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
A	172.9	139.0	207.9	174.0	7.7	2.5	60.0	111.5	70.0	5.8	75.0	67.0	M5
B	202.9	169.0	237.9	204.0									
C	232.9	199.0	267.9	234.0									
D	262.9	229.0	297.9	264.0									
089	Feedback EF, FF				Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts
	Unbraked length		Braked length		LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
A	177.8	140.5	217.9	180.6	10.3	2.2	80.0	130.5	91.0	7.0	100.0	89.0	M6
B	207.8	170.5	247.9	210.6									
C	237.8	200.5	277.9	240.6									
D	267.8	230.5	300.9	270.6									
	CA, GF, HF				Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts
	Unbraked	Braked	Unbraked	Braked	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
	LB (± 0.9)	LB (± 0.9)	LB (± 0.9)	LB (± 0.9)	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
A	190.8	230.9	167.8	207.9	10.3	2.2	80.0	130.5	91.0	7.0	100.0	89.0	M6
B	220.8	260.9	197.8	237.9									
C	250.8	290.9	227.8	267.9									
D	280.8	320.9	257.8	297.9									
115	Feedback EF, FF				Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts
	Unbraked length		Braked length		LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
A	193.8	154.0	230.9	191.1	13.2	2.7	110.0	156.5	116.0	10.0	130.0	115.0	M8
B	223.8	184.0	260.9	221.1									
C	253.8	214.0	290.9	251.1									
D	283.8	244.0	320.9	281.1									
	CA, GF, HF				Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts
	Unbraked	Braked	Unbraked	Braked	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
	LB (± 0.9)	LB (± 0.9)	LB (± 0.9)	LB (± 0.9)	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
A	206.8	243.9	183.8	220.9	13.2	2.7	110.0	156.5	116.0	10.0	130.0	115.0	M8
B	236.8	273.9	213.8	250.9									
C	266.8	303.9	243.8	280.9									
D	296.8	333.9	273.8	310.9									
142	Unbraked length		Braked length		Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts
	LB (± 0.9)	LC (± 1.0)	LB (± 0.9)	LC (± 1.0)	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
A	187.0	152.5	252.5	218.0	14.0	3.4	130.0	183.5 (Size 1)	142.0	12.0	165.0	142.0	M10
B	217.0	182.5	282.5	248.0									
C	247.0	212.5	312.5	278.0									
D	277.0	242.5	342.5	308.0									
E	307.0	272.5	372.5	338.0									
190	Unbraked length		Braked length		Flange thickness	Register length	Register diameter	Overall height	Flange square	Fixing hole diameter	Fixing hole PCD	Motor housing	Mounting bolts
	LB (± 0.9)	LC (± 1.0)	LB (± 0.9)	LC (± 1.0)	LA (± 0.5)	T (± 0.1)	N (j6)	LD (± 0.3)	P (± 0.3)	S (H14)	M (± 0.5)	PH (± 0.5)	
A	190.6	161.1	289.1	259.6	18.5	3.9	180.0	252.5	190.3	14.5	215.0	190.0	M12
B	220.6	191.1	319.1	289.6									
C	250.6	221.1	349.1	319.6									
D	280.6	251.1	379.1	349.6									
E	310.6	281.1	409.1	379.6									
F	340.6	311.1	439.1	409.6									

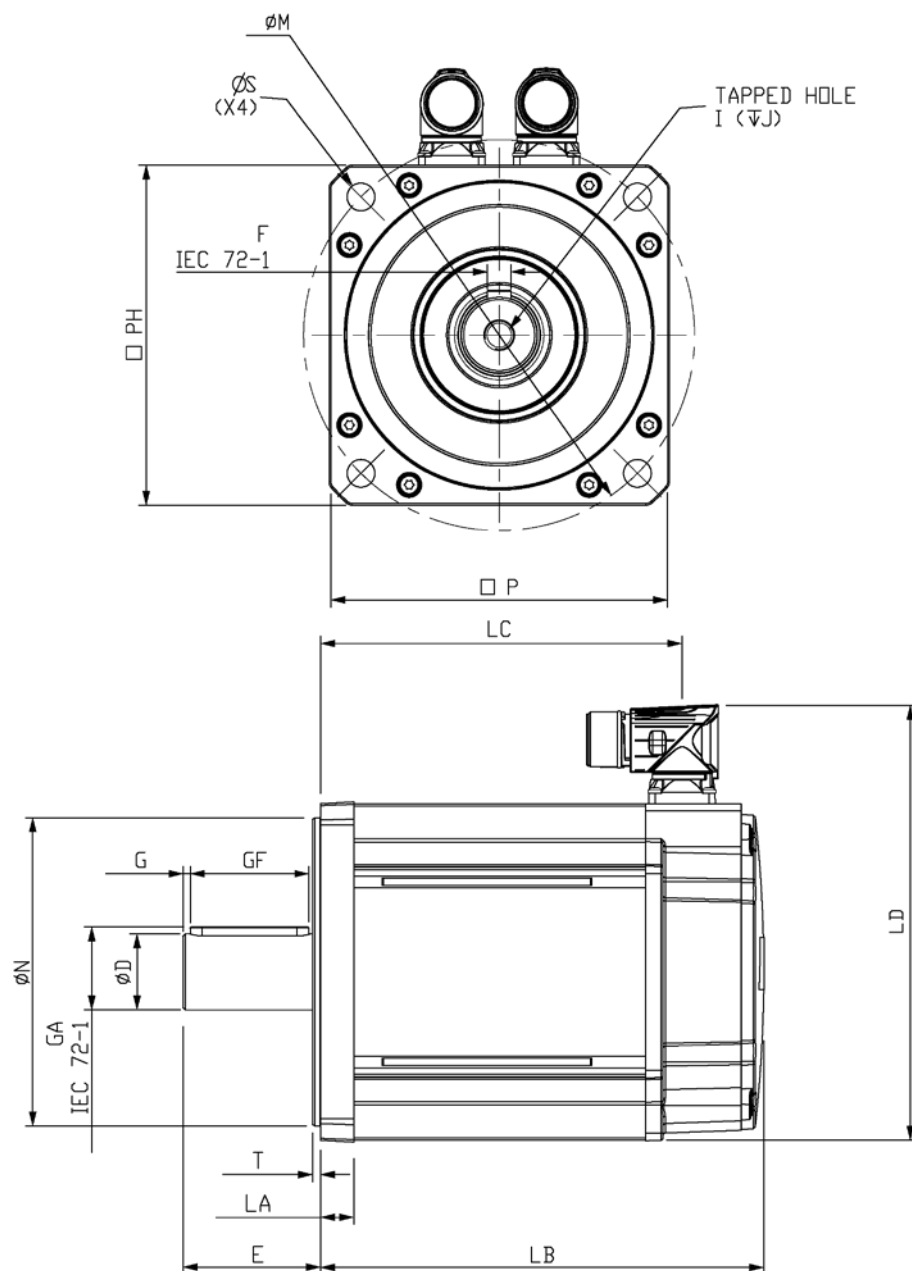

	Shaft diameter	Shaft length	Key height	Key length	Key to shaft end	Key width	Tapped hole thread size	Tapped hole depth
	D (j6)	E	GA	GF	G	F (h9)	I	J (± 1)
067	14.0	30.0	16.0	25.0	1.5	5.0	M5 x 0.8	13.5
089	19.0	40.0	21.5	32.0	3.7	6.0	M6 x 1.0	17.0
115	24.0	50.0	27.0	40.0	5.3	8.0	M8 x 1.25	20.0
142	32.0	58.0	35.0	50.0	3.0	10.0	M12 x 1.75	29.0
190	38.0	80.0	41.0	70.0	4.6	10.0	M12 x 1.75	29.0

NOTE: The motor drawing is for dimensional purposes only, motors will differ in appearance.

Performance Definitions

Stall torque

This is the maximum torque within the continuous zone at zero speed. Maximum continuous torque ratings may be intermittently exceeded for short periods provided that the winding Δt max temperature is not exceeded.

Δt max = 100 °C over a maximum ambient of 40 °C for Unimotor hd.

Stall current

Stall current = Stall torque / k_t

Motor label and performance tables quote stall current when motor is at full power in a maximum ambient of 40 °C.

Rated speed

This is the maximum speed of the motor within the continuous zone. The motor speed can be controlled to any speed subject to the voltage limits and drive constraints as shown by the intermittent zone on a motor performance graph.

K_e voltage constant

This is the phase to phase rms voltage generated at the stator when the shaft is back driven at 1,000 rpm with the rotor at 20 °C.

K_t torque constant

A brushless motor delivers torque proportional to the current, such that torque = $K_t \times$ current.

Where $K_t = 0.0165 \times K_e$ (at 20 °C).

Magnets used on all motors are affected by temperature such that K_e and K_t reduce with increasing temperatures of the magnets.

Winding thermal time constant

The thermal time constant of the winding with respect to the stator temperature as a reference in the exponential temperature rise given by the formula:

Winding temperature at time t seconds = $T_0 + T_1 (1 - e^{-t/t_c})$

Where T_0 is the initial temperature, T_1 is the final winding temperature and t_c = thermal time constant (seconds)

Note that temperature = 63.2 % of T_1 when $t = t_c$. A thermal protection trip is provided by the drive, based upon calculations using elapsed time, current measurement, and the parameter settings set by the user or directly from the motor map.

Unimotor hd windings are ultimately protected by thermistor devices in the winding overhangs. These must be connected to the appropriate drive inputs via the motor feedback signal connector.

Rated power

This is the product of the rated speed (radian/s) and the rated torque (Nm) expressed in Watts (W)


Δt temperature

Δt temperature is the temperature difference between the copper wires of the motor winding and the ambient air temperature surrounding the motor.

The maximum Δt temperature permitted is 100 °C over a maximum ambient of 40 °C. (i.e. a maximum winding temperature of 140 °C)



Nameplate definitions

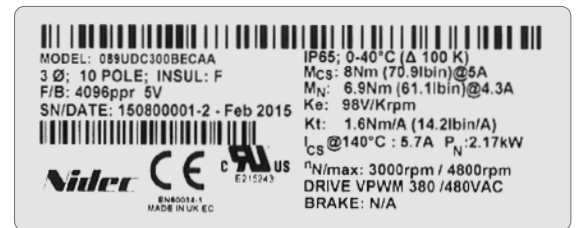

Model Full part number of the motor

3Ø Indicates this is a 3 phase motor

POLE Number of poles:

060-190 – 10 poles – 5 pole pairs

Insul Windings are built to class F (155 °C)

F/B This gives the feedback device, count and working voltage or the feedback type

S/N/DATE The serial number and date the motor was manufactured

IP Ingress protection rating IP 65S

Mcs The stall torque at stall current

Mn The rated torque of the motor

Ke This is the AC Volts per 1,000 rpm with the motor at 20 °C

Kt Value shown is for the magnet's temperature at 20 °C

Ics The constant stall current at the maximum winding temperature of 140 °C

Pn The rated power of the motor

• **nN/max** The rated speed. This is the maximum speed allowed when taking into account these three factors:

- Max drive voltage
- Max encoder speed
- Max mechanical speed

VPWM This indicates that the motor is for use with a voltage pulse width modulated drive with the supply voltage shown

Brake The current, that rated torque and the operation voltage for the brake or N/A if the brake is not fitted

Unimotor hd

Motor derating

Ambient temperatures

The ambient temperature around the motor must be taken into account. For ambient temperatures above 40 °C the torque must be derated using the following formula as a guideline. (Note: Only applies to 2,000/3,000 rpm motors and assumes copper losses dominate.)

$$\text{New derated torque} = \text{Specified torque} \times \sqrt{1 - ((\text{Ambient temperature} - 40^\circ\text{C}) / 100)}$$

For example with an ambient temperature of 76 °C the new derated torque will be 0.8 x specified value


Thermal test conditions

The performance data shown has been recorded under the following conditions. Ambient temperature 20 °C, with the motor mounted on a thermally isolated aluminium plate as shown below.

Mounting arrangements

The motor torque must be derated if:

- The motor mounting surface is heated from an external source, such as a gearbox.
- The motor is connected to a poor thermal conductor.
- The motor is in a confined space with restricted air flow.

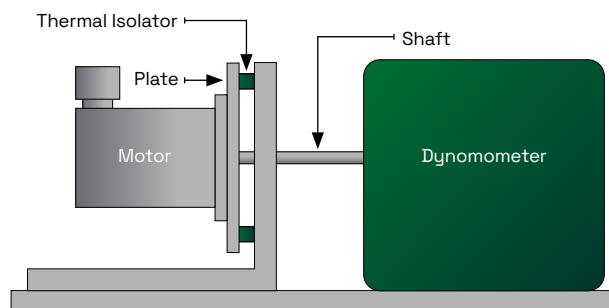

Heatsink drawing	Aluminium heatsink plate
060-089	250 x 250 x 15 mm
115-142	350 x 350 x 20 mm
190-250	500 x 500 x 20 mm

Unimotor hd derate factors

Switching frequency	060	067	089	115	142	190
3 kHz	n/a	0.93	0.89	0.89	0.83	0.9
4 kHz	n/a	0.94	0.91	0.92	0.85	0.95
6 kHz	n/a	0.95	0.95	0.96	0.88	1
8 kHz	0.99	0.98	0.97	0.98	0.91	1
12/16 kHz	1	1	1	1	1	1

NOTE: Only applies to motors up to 3,000 rpm (rms) or lower. Assumes copper losses dominate on all frame sizes. Derate factor is applied to stall torque, rated torque, stall current and rated power.

Unimotor hd

Brake specifications

Unimotor hd may be ordered with an internal rear mounted spring applied parking brake. The brake works on a failsafe principle. The brake is active when the supply voltage is switched off, and the brake is released when the supply voltage is switched on.

If a motor is fitted with a failsafe brake, take care not to subject the motor shaft to excessive torsional shocks or resonance when the brake is engaged or disengaged. Doing so can damage the brake.

Safety note

The failsafe brake is for use as a holding brake with the motor shaft stationary. Do NOT use it as a dynamic brake. Using it in this manner will cause brake wear and eventual failure. Emergency Stop situations can contribute to brake wear and failure.

Brake data

Motor frame	Supply volts	Input power @ 20 °C	Static torque @120 °C Parking Brake '6'	Release time	Moment of inertia	Backlash *
Size	Vdc	W	Nm	ms nom.	kg.cm ²	Degrees *
060	24	7.2	2	60	0.02	0.80 °
067	24	15	4	35.2	0.063	0.62 °
089	24	18.5	10	72.8	0.259	0.45 °
115	24	17.5	16	64	0.506	0.38 °
142 (A-B)	24	17.5	16	64	0.506	0.38 °

Motor frame	Supply volts	Input power	Static torque @120 °C Parking Brake '5'	Release time	Moment of inertia	Backlash *
Size	Vdc	W	Nm	ms nom.	kg.cm ²	Degrees *
142 (C-E)	24	25	38	95	1.85	0.77 °
190 (A-D)	24	25	60	120	4.95	0.77 °
190 (E-F)	24	54.5	90	250	7.72	0.75 °

- * Backlash figure will increase with time.
- The brake is intended for parking duty and is not for dynamic or safety use.
- Refer to your Automation Center or Distributor if your application requires dynamic braking in emergency conditions.
- To provide protection to the brake control circuit it is recommended that a diode is connected across the output terminals of the solid state or relay contacts devices.
- Larger torque brakes are available as an option. Contact your Automation Center or Distributor for details.
- Unless otherwise stated, all figures are representative at 20 °C brake temperature.
- The brake will engage when power is removed.
- Multiply static torque value by 1.1x for minimum holding torque at 20-100 °C

It is recommended to run extensive application validation testing and confirm the motor brake life span when the motor is mounted vertically and the motor runs through high acceleration and deceleration.

Additional motor weights all figures are subject to a tolerance of (±10 %)

Motor frame size	060	067	089	115	142	142	190
Frame length	A to C	A to D	A to D	A to D	A to B	C to E	A to F
Braked '5' brake						+2.8 kg	+4.0 kg
Braked '6' brake	+0.28 kg	+0.68 kg	+1.4 kg	+2.09 kg	+2.29 kg		
Hybrid box							+1.5 kg

Feedback



Feedback device order code	Feedback type	Manufacturer	Encoder supply voltage	SinCos cycle or incremental pulses per revolution	Resolution available to position loop ²	Absolute multi-turn revolutions	Feedback accuracy ¹	Single cable connector available ³	Serial communication protocol
CN	Incremental Encoder	NMC	5 Vdc ± 10%	4096	Medium 16384 (14 bits)	-	Low ±720 "	-	-
EH	Optical Encoder	IXARC	5 Vdc (±0.25 V)	N/A	Medium 1.3 x 10 ⁵ (17 bits)	4096 12 bits	High ±316 "	-	BiSS-C
060 - 067 motors (refer to order codes page 7)									
AR	Resolver	LTN RE – 15	7 Vdc Excitation 5 kHz	1 Transformation ratio 0.5	Medium 16384 (12.5 bits)	-	Low ±600 "	-	-
EG	Inductive EnDat Only	EQI1131	3.6 - 14 Vdc	N/A	High 5.24 x 10 ⁵ (19 bits)	4096 12 bits	Medium ±120 "	6 wire HMC6	EnDat 2.2
FG		ECI1119				-			
060 - 115 motors (refer to order codes page 7)									
EE	Inductive	EQI1131	4 - 14 Vdc	N/A	19	4096 12 bits	Medium ±120 "	Yes	EnDat 3
FE	Inductive	ECI1119	4 - 14 Vdc	N/A	19	-	Medium ±120 "	Yes	EnDat 3
EP	Inductive	EQI1134	4 - 14 Vdc	N/A	22	4096 12 bits	High ±65 "	Yes	EnDat 3
FP	Inductive	ECI1122	4 - 14 Vdc	N/A	22	-	High ±65 "	Yes	EnDat 3
067 motors (refer to order codes page 7)									
CR	Incremental Encoder	R35i	5 Vdc ± 10%	4096	Medium 16384 (14 bits)	-	Medium ±150 "	-	-
EZ	Optical Encoder	IXARC	5 Vdc (± 0.25 V)	N/A	Medium 8.39 x 10 ⁵ (23 bits)	4096 12 bits	High ±50 "	-	BiSS-C
089 – 190 motors (refer to order codes page 7)									
AE	Resolver	Size 52	6 Vdc Excitation 6 kHz	1 Transformation ratio 0.31	Medium 16384 (12.5 bits)	-	Low ±720 "	-	-
CA	Incremental Encoder	CFS50	5 Vdc ± 10%	4096	Medium 16384 (14 bits)	-	High ±60 "	-	-
EZ	Optical Encoder	IXARC	5 Vdc (± 0.25 V)	N/A	Medium 8.39 x 10 ⁵ (23 bits)	4096 12 bits	High ±50 "	-	BiSS-C
EF	Inductive EnDat	EQI1331	3.6 – 14 Vdc	N/A	High 5.24 x 10 ⁵ (19 bits)	4096 12 bits	High ±65 "	6 wire HMC6	EnDat 2.2
FF		ECI1319				-			
GF	Optical EnDat Only	EQN1337	3.6 - 14 Vdc	N/A	Very High 3.35 x 10 ⁷ (25 bits)	4096 12 bits	Very high ±20 "	6 wire HMC6	EnDat 2.2
HF		ECN1325				-			
142 - 190 motors (refer to order codes page 7)									
ED	Inductive	EQI1331	4 - 14 Vdc	N/A	19	4096 12 bits	High ±65 "	Yes	EnDat 3
GD	Optical	EQN1337	4 - 14 Vdc	N/A	25	4096 12 bits	Very high ±20 "	Yes	EnDat 3
Functional safety encoder option available on request from the factory – part number option code confirmed by factory									

¹The information is supplied by the feedback device manufacturer and relates to it as a standalone device.

²The output from the resolver is an analogue output; the resolution is determined by the analogue to digital converter used.



³To be ordered with single cable connector, see connector options. 6 wire HMC6 must be ordered with KTY 84-130 thermistor, see inertia options.

Power Plug - motor end




Size 1 - Type B			Size 1.5 - Type J Connector		
With brake		Without brake	With brake		Without brake
Pin	Function	Function	Pin	Function	Function
1	Phase U (R)	Phase U (R)	U	Phase U (R)	Phase U (R)
2	Phase V (S)	Phase V (S)	V	Phase V (S)	Phase V (S)
3	Ground	Ground	⊕	Ground	Ground
4	Phase W (T)	Phase W (T)	W	Phase W (T)	Phase W (T)
5	Brake		+	Brake	
6	Brake		-	Brake	
Shell	Screen	Screen	Shell	Screen	Screen

Signal Plug - motor end




SI		SE	SR
Incremental encoder (CA, CR)		Heidenhain EnDat 2.2 & BiSS-C absolute encoders (EH, EZ, EF, FF, EG, FG, GF, HF)	Resolver (AE, AR)
Pin	Function	Function	Function
1	Thermistor	Thermistor	Excitation High
2	Thermistor	Thermistor	Excitation Low
3		Screen (Optical only)	Cos High
4	S1		Cos Low
5	S1 Inverse		Sin High
6	S2		Sin Low
7	S2 Inverse		Thermistor
8	S3	+ Clock	Thermistor
9	S3 Inverse	- Clock	
10	Channel A		
11	Index	+ Data	
12	Index Inverse	- Data	
13	Channel A Inverse		
14	Channel B		
15	Channel B Inverse		
16	+ V	+ V	
17	0 V	0 V	
Body	Screen	Screen	

Power & signal combined plug - motor end

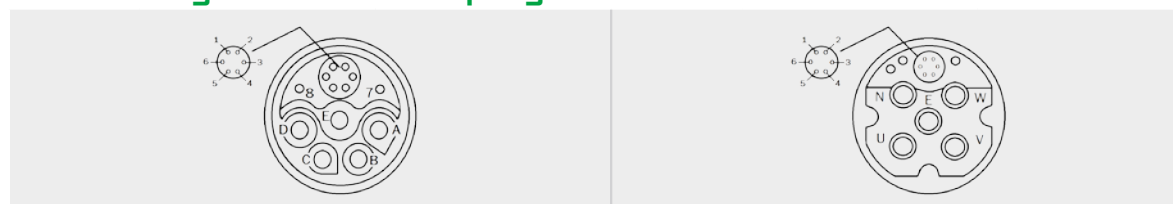


Size 1 - Type D Connector & Type S Connector			Size 1.5 - Type E Connector		
Heidenhain EnDat 2.2 only absolute encoders (EF, FF, EG, FG, GF, HF)			Heidenhain EnDat 2.2 only absolute encoders (EF, FF, GF, HF)		
Pin	With brake Function	Without brake Function	Pin	With brake Function	Without brake Function
1	+ Volts	+ Volts	1	+ Volts	+ Volts
2	0 Volts	0 Volts	2	0 Volts	0 Volts
3	+ Data	+ Data	3	+ Data	+ Data
4	- Data	- Data	4	- Data	- Data
5	+ Clock	+ Clock	5	+ Clock	+ Clock
6	- Clock	- Clock	6	- Clock	- Clock
7	- Brake	-	N	-	-
8	+ Brake	-	U	Phase U (R)	Phase U (R)
A	Phase U (R)	Phase U (R)	V	Phase V (S)	Phase V (S)
B	Phase V (S)	Phase V (S)	PE	Ground	Ground
C	Phase W (T)	Phase W (T)	W	Phase W (T)	Phase W (T)
D	-	-	+	Brake	-
E	Ground	Ground	-	Brake	-

15 Way plug - drive end

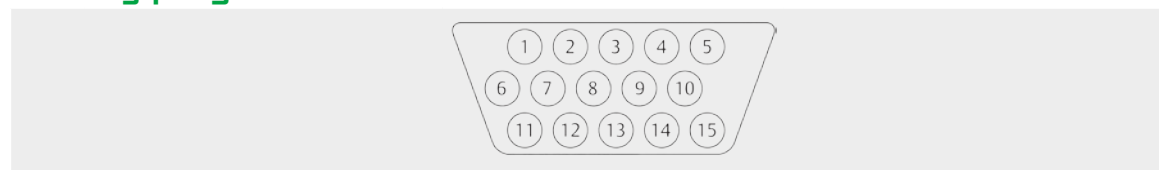

SI Incremental encoders (CA, CR)		SE EnDat 2.2 only absolute encoders (EF, FF, EG, FG, GF, HF)		SR Resolvers (AE, AR)
Pin	Function	Function	Function	Function
1	Channel A	+ Data		+ Cos
2	Channel A Inverse	- Data		- Cos
3	Channel B	+ Clock		+ Sin
4	Channel B Inverse	- Clock		- Sin
5	Index			+ Excitation
6	Index Inverse			- Excitation
7	S1			
8	S1 Inverse			
9	S2			
10	S2 Inverse			
11	S3			
12	S3 Inverse			
13	+ V	+ V		
14	0 V	0 V		Thermistor
15	Thermistor	Thermistor		Thermistor
Body	Screen	Screen		Screen



Y-TEC Signal/Power plug - motor end 060 frame



Signal - Type T Connector

Power - Type T connector

(CN)		With brake		Without brake
Pin	Function	Pin	Function	Function
1	Ground	A	Phase U	Phase U
2	Channel A	B	Phase V	Phase V
3	Channel A Inverse	C	Phase W	Phase W
4	Channel B	1	Thermistor +	Thermistor +
5	Channel B Inverse	2	Thermistor -	Thermistor -
6	+ V	3	+ V	
7	S1	4	0 Volts	
8	S2	⊕	Ground	Ground
9	S3			
10	S1 Inverse			
11	S2 Inverse			
12	S3 Inverse			
A	Index			
B	Index Inverse			
C	-			



Signal - Type T Connector

(EG / FG)		Resolver
Pin	Function	Function
1	+ V	-
2	+ Data	-
3	- Data	-
4	+ Clock	-
5	- Clock	-
6	-	Excitation Low
7	0 Volts	-
8	-	Sin High
9	-	Sin Low
10	-	Cos High
11	-	Cos Low
12	-	Excitation High

Perfect combinations



Digitax HD

Optimised for high-dynamic applications, Digitax HD provides the flexibility of both standalone and modular configurations. The drive offers full servo control plus open loop permanent magnet and induction motor control across four functionality levels: EtherCAT, MCI machine control, multiprotocol Ethernet and the flexible Base drive.

For motors below 16 A continuous stall current.

Unidrive M700

Unidrive M700 series provides high performance motor control and ultimate control flexibility in order to satisfy the requirements of machine builders and high specification industrial and hoisting applications.

For motors 16 A and above continuous stall current.

Unimotor hd

Unimotor hd is Control Techniques' high dynamic brushless AC servo motor range. With high peak torque, low inertia and the most compact dimensions, Unimotor hd is optimised for applications requiring rapid acceleration and deceleration.



Please refer to the Digitax HD and Unidrive M brochures for more detailed information.





Automotive

Innovative
environmental
comfort

The world's leading global manufacturer of electric motors and controls

Nidec, the world's largest motor brand.

Nidec is in everything, everywhere.

If you drive a car, wash your clothes, watch movies or talk on a smartphone, you're using Nidec technology. Almost anything that spins and moves, no matter how big or small, does so thanks to a Nidec product.

Our shared values of passion, enthusiasm and tenacity guide us on our collective journey to be the best.



Appliance, commercial & industrial motors

Energy efficient motor and drive technology for commercial, industrial, and home appliances

Automotive

ing to help improve safety,
mental protection and
t required for automobiles



Small precision motors

DC motors for all industries
and applications



Motion & Energy

High-performance motors, drives,
generators & energy management
solutions for renewables, automation,
infrastructure, and electric vehicles

Machinery

Machines, factory automation
equipment, measuring, and
testing devices



Connect with us



www.drivesfromnidec.com

©2026 Nidec Control Techniques Limited. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Nidec Control Techniques Ltd have an ongoing process of development and reserve the right to change the specification of their products without notice.

Nidec Control Techniques Limited. Registered Office: The Gro, Newtown, Powys SY16 3BE.

Registered in England and Wales. Company Reg. No. 01236886.

